



LIMEX
CROATIA
WHEELBARROWS
MIXERS



Uvod / Introduction

1999. godine Limex je izgradio tvornicu koja je ubrzo postala jedna od najvećih europskih proizvođača miješalica za beton i kolica te prepoznata po kvaliteti i konkurentnosti i izvan nacionalnih granica. Altrad Limex d.o.o., kao članica Altrad Grupe, smještena je na strateški idealnoj poziciji između istoka i zapada koja omogućuje brže isporuke te nižu cijenu transporta. Velikom obujmom proizvodnje smo u stanju osigurati nižu konačnu cijenu proizvoda, zadržavajući pritom visoku kvalitetu koju je prepoznalo europsko tržište još 90-ih godina prošlog stoljeća. Ulažući znatna sredstva za poticanje inovativnosti, neprestano usavršavamo postojeće proizvode te razvijamo nove koje možete pronaći na stranicama ovog kataloga. U svom poslovanju najveću moguću pažnju pridajemo održivom razvoju, maksimalnoj brizi za svakog pojedinog djelatnika te zaštiti čovjekova okoliša. Naši djelatnici će rado odgovoriti na sve Vaše upite u najkraćem mogućem roku, a golemim i učinkovitim proizvodnim kapacitetima, najsuvremenijim tehnologijama, znanjem i iskustvom smo u mogućnosti udovoljiti i najzahtjevnijim potrebama kupaca.

In 1999, Limex built a factory that soon became one of Europe's largest concrete mixer manufacturers, recognized for quality and competitiveness beyond the national boundaries. Altrad Limex d.o.o., as a member of Altrad Group, is strategically ideally positioned between the East and West, allowing faster delivery and lower transport costs. With a large volume of production, we are able to provide lower final product prices, while retaining the high quality recognized by the European market in the 90s of the last century. By investing considerable resources to foster innovation, we continually improve existing products and develop new ones which you can find on the pages of this catalog. In our business we give the greatest possible attention to sustainable development, maximum care for each employee and protection of the human environment. Our employees will be happy to answer all Your inquiries in the shortest time possible, with huge and efficient production capacities, with the most up-to-date technologies, knowledge and experience we are able to meet even the most demanding customer needs.

Sadržaj / Content

Altrad Limex

Mješalice / Mixers	3
Kolica / Wheelbarrow	6
Transportna kolica / Transport Troll	10

Altrad Poland

Mješalice / Mixers	12
--------------------	----

Altrad Saint-Denis

Mješalice / Mixers	13
--------------------	----

Altrad Atika

Ručni mješalica / Handheld agitator	14
Zidna brusilica / Dry wall sander	15
Građevinska kružna pila / Construction circular saw	16
Nagibna kružna pila / Bench saw	18
Skupljač prašine / Dust collector	19
Maketerska pila / Scroll saw	19
Tračna pila / Band saw	19
Stolna blanjalica / Surface planing & thicknessing machine	20
Kutna pila / Crosscut and mitre saw	20
Pila za pločice / Radial tail cutters	21
Odvlaživač zraka / Dehumidifier	22
Grijač za terasu / Patio heater	23
Mjerač vlage / Moisture meter	23
Vrtna drobilica / Garden shredder	23
Škare za živicu / Hedge trimmer	25
Motorna pila / Chain saw	27
Pila za drva / Log saw	29
Cjepač drva / Log splitter	30
Orač / Tiller	33
Bušač za zemlju / Earth auger	33
Stroj za rahljenje trave / Scarifier - Lawn raker	33
Trimer / Trimmer	34
Puhalo za lišće / Vacuum blower	35
Čistači / Push sweeper	35

Altrad Belle

Vibro ploča / Plate compactor	36
Stupni nabijač / Rammer	38
Valjak / Hand roller	39
Ručni vibrator / Poker	39
Vibro letva / Screeder	40
Alati / Accessories	41
Gladilice / Trowel	42
Stolna rezalica / Bench saw	43
Rezne ploče / Blades	43
Rezač blokova / Block Paving splitter	44
Hidraulični čekić / Hydraulic Breakers	45
Pribor za hidraulične čekiće / Breaker Steel	46
Agregat / Power Pack	47
Hidraulični rezač / Disc Cutter	47
Hidraulična vodena pumpa / Hydraulic Water Pump	47
BMD	48
BMD dodaci / BMD accessories	48
Agregat / Generators	49
Jedinica za testiranje / Test Unit	49

Altrad Plettac Assco

Građevinske skele / Facade Scaffolding	50
--	----

STS

Aluminijske ljestve / Aluminum latter	52
---------------------------------------	----


Dinamo HIT

Emailirani program	56
--------------------	----



Mješalice / Mixers


125LS

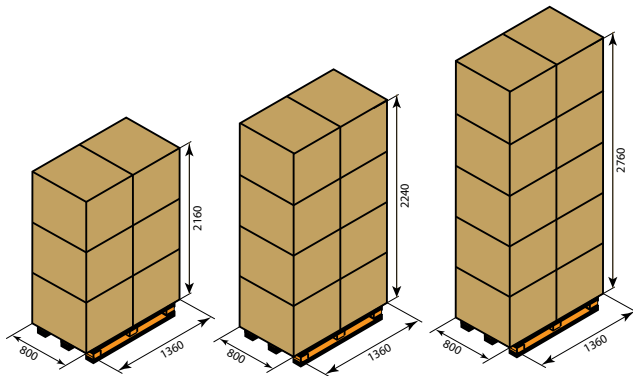

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga Power	Zupčanik Cogwheel	Masa Weight	Pakiranje Packing	Dimenzije sastavljene miješalice Assembled mixer dimensions	Kom / šleper Pcs / truck
125LS	700W	Lijeivano željezo Cast iron	45kg	6, 8 or 10 pcs / Pallet	800 x 1150 x 1300mm	168-310


125LP

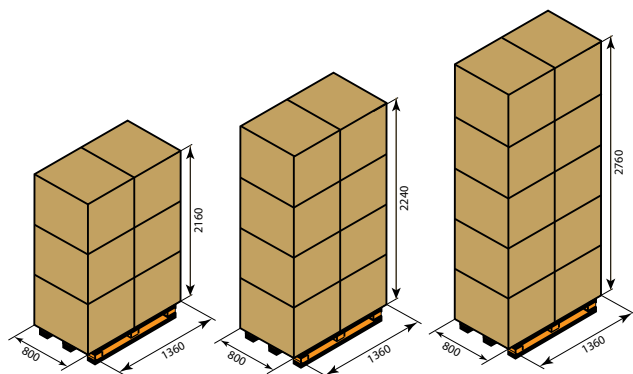

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga Power	Zupčanik Cogwheel	Masa Weight	Pakiranje Packing	Dimenzije sastavljene miješalice Assembled mixer dimensions	Kom / šleper Pcs / truck
125LP	700W	Poliamid / Polyamide	40kg	6, 8 or 10 pcs / Pallet	800 x 1150 x 1300mm	168-310


165LS



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga Power	Zupčanik Cogwheel	Masa Weight	Pakiranje Packing	Dimenzije sastavljene miješalice Assembled mixer dimensions	Kom / šleper Pcs / truck
165LS	700W	Lijevano željezo Cast iron	53kg	6 pcs / Pallet	800 x 1200 x 1350mm	162-168

165LP




TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga Power	Zupčanik Cogwheel	Masa Weight	Pakiranje Packing	Dimenzije sastavljene miješalice Assembled mixer dimensions	Kom / šleper Pcs / truck
165LP	700W	Poliamid / Polyamide	46kg	6 pcs / Pallet	800 x 1200 x 1350mm	162-168




190LS/LSA



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga Power	Zupčanik Cogwheel	Masa Weight	Pakiranje Packing	Dimenzije sastavljene miješalice Assembled mixer dimensions	Kom / šleper Pcs / truck
190LS	850W	Lijeвано željezo Cast iron	54kg	6 pcs / Pallet	800 x 1200 x 1420mm	162-168
190LSA	1000W	Lijeвано željezo Cast iron	55kg	6 pcs / Pallet	800 x 1200 x 1420mm	162-168

190LP/LPA



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga Power	Zupčanik Cogwheel	Masa Weight	Pakiranje Packing	Dimenzije sastavljene miješalice Assembled mixer dimensions	Kom / šleper Pcs / truck
190LP	850W	Poliamid / Polyamide	47kg	6 pcs / Pallet	800 x 1200 x 1420mm	162-168
190LPA	1000W	Poliamid / Polyamide	48kg	6 pcs / Pallet	800 x 1200 x 1420mm	162-168



LIMEX
CROATIA
WHEELBARROWS
MIXERS

Kolica / Wheelbarrow

Vrtna jednodijelna kolica 80

One-piece agricultural wheelbarrow 80

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra Artikla Article code	Kom./paleta Pcs / pallet	Masa Weight	Dimenzije pakiranja Packaging dimension	Volumen Volume	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
Vrtna jednodijelna kolica 80 One-piece agricultural wheelbarrow 80	100301/100305	125	9,30kg	1200x1800x2600mm	80L	1625-1875	Ø 25	3.5x8/3.5x6, PP



Vrtna dvodijelna kolica 80

Two-piece agricultural wheelbarrow 80

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra Artikla Article code	Kom./paleta Pcs / pallet	Masa Weight	Dimenzije pakiranja Packaging dimension	Volumen Volume	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
Vrtna dvodijelna kolica 80 Two-piece agricultural wheelbarrow 80	100382/100384	75	8,70kg	1200x1250x2000mm	80L	1650-1950	Ø 25	3.5x8/3.5x6, PP



Vrtna kolica sa 2 kotača 80

Wheelbarrow with 2 wheels 80

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra Artikla Article code	Kom./paleta Pcs / pallet	Masa Weight	Dimenzije pakiranja Packaging dimension	Volumen Volume	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
Vrtna kolica s 2 kotača 80 Wheelbarrow with 2 wheels 80	100350	50	12,40kg	1200x1700x1800mm	80L	800-850	Ø 32	3.5x8, PP



Građevinska kolica Compact 75

Construction wheelbarrow Compact 75

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra Artikla Article code	Kom./paleta Pcs / pallet	Masa Weight	Dimenzije pakiranja Packaging dimension	Volumen Volume	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
Građevinska kolica Compact 75 Construction wheelbarrow Compact 75	100400	-	11,50kg	600x1400x690mm	75L	cca 300	Ø 32	3.5x8





Građevinska kolica standard 85

Construction wheelbarrow Standard 85

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra Artikla Article code	Kom./paleta Pcs / pallet	Masa Weight	Dimenzije pakiranja Packaging dimension	Volumen Volume	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
Građevinska kolica Standard 85 Construction wheelbarrow Standard 85	100000	60	11,70kg	1200x1500x2400mm	85L	960-1020	Ø 32	3.5x8



Građevinska kolica standard 100

Construction wheelbarrow Standard 100

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra Artikla Article code	Kom./paleta Pcs / pallet	Masa Weight	Dimenzije pakiranja Packaging dimension	Volumen Volume	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
Građevinska kolica Standard 100 Construction wheelbarrow Standard 100	100100	60	12,50kg	1200x1500x2400mm	100L	960-1020	Ø 32	3.5x8



Građevinska kolica-PP korito 100

Construction wheelbarrow -PP tray 100

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra Artikla Article code	Kom./paleta Pcs / pallet	Masa Weight	Dimenzije pakiranja Packaging dimension	Volumen Volume	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
Građevinska kolica Standard 100 Construction wheelbarrow Standard 100	100500	60	10,40kg	1200x1500x2400mm	100L	900-960	Ø 32	4.0x8, PP



Građevinska kolica - Profi 100

Construction wheelbarrow - Profi 100

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra Artikla Article code	Kom./paleta Pcs / pallet	Masa Weight	Dimenzije pakiranja Packaging dimension	Volumen Volume	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
Građevinska kolica - Profi 100 Construction wheelbarrow - Profi 100	100200	50	12,90kg	1200x1600x2000mm	100L	750-800	Ø 32	4.0x8





LIMEX
CROATIA
WHEELBARROWS
MIXERS

Kolica / Wheelbarrow

Građevinska kolica AL 85

Construction wheelbarrow AL 85

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Pakiranje Packaging	Dimenzije pakiranja Packaging dimensions	Težina pakiranja Packaging weight	Komada na paleti QTY / pallet	Komada / šleper 13.6m QTY / truck 13.6m
Okvir GK 25 Hybrid zeleni+kotač 3.5x8 Frame GK 25 Hybrid green+wheel 3.5x8	Na paleti On pallets	1200x1600x2500mm	767kg	125	2000 kom./okvir+kotač 2000 pcs / frame+wheel
					1625 kom./okvir+kotač+korito 1625 pcs / frame+wheel+tray
Korito HOFMANINGER Tray HOFMANINGER	Na paleti On pallets	820x1250x1700mm	764kg	200	



Građevinska kolica AL 85 Zn

Construction wheelbarrow AL 85 Zn

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Pakiranje Packaging	Dimenzije pakiranja Packaging dimensions	Težina pakiranja Packaging weight	Komada na paleti QTY / pallet	Komada / šleper 13.6m QTY / truck 13.6m
Okvir ARF 2770 R+L dvodijelna + kotač 3.5x8 Frame ARF 2770 R+L two-piece + wheel 3.5x8	Na paleti On pallets	1200x1300x1800mm	667kg	120	2400 kom./okvir+kotač 2400 pcs / frame+wheel
					1800 kom./okvir+kotač+korito 1800 pcs / frame+wheel+tray
Korito HOFMANINGER Tray HOFMANINGER	Na paleti On pallets	820x1250x1700mm	764kg	200	



Građevinska kolica ALP 100

Construction wheelbarrow ALP 100

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Pakiranje Packaging	Dimenzije pakiranja Packaging dimensions	Težina pakiranja Packaging weight	Komada na paleti QTY / pallet	Komada / šleper 13.6m QTY / truck 13.6m
Okvir ARF 2760 model G fi 32 3780 + kotač 3.5x8 Frame ARF 2760 model G fi 32 3780 + wheel 3.5x8	Na paleti On pallets	1200x1700x1800mm	570kg	80	1280 kom./okvir+kotač 1280 pcs / frame+wheel
					1120 kom./okvir+kotač+korito 1120 pcs / frame+wheel+tray
Korito HOFMANINGER Tray HOFMANINGER	Na paleti On pallets	680x840x850mm	823kg	200	





Građevinska kolica AL 100

Construction wheelbarrow AL 100

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Pakiranje Packaging	Dimenzije pakiranja Packaging dimensions	Težina pakiranja Packaging weight	Komada na paleti QTY / pallet	Komada / šleper 13.6m QTY / truck 13.6m
Okvir ARF 2820 HYBRID fi 32 4180 + kotač 3.5x8 Frame ARF 2820 HYBRID fi 32 4180 + wheel 3.5x8	Na paleti On pallets	1200x1800x1800mm	560kg	80	1120 kom./okvir+kotač 1120 pcs / frame+wheel
					1080 kom./okvir+kotač+korito 1080 pcs / frame+wheel+tray
Korito HOFMANINGER Tray HOFMANINGER	Na paleti On pallets	640x840x850mm	823kg	200	



Građevinska kolica Africa 85

Construction wheelbarrow Africa 85



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Pakiranje Packaging	Dimenzije pakiranja Packaging dimensions	Težina pakiranja Packaging weight	Komada na paleti QTY / pallet	Količina 20" kontejner Quantity 20" container	Količina 40" kontejner Quantity 40" container	Komada / šleper 13.6m QTY / truck 13.6m	Težina kolica Assembled wheelbarrow weight
Građevinska kolica Africa 85 - Točkovi 3.5 x 8 Construction Wheelbarrow Africa 85 - Wheels 3.5 x 8	Na paleti / Drvena kutija On pallets / Wood case	1160x2300x1050mm	780kg	50 kom.	500 kom.	1000 kom.	1200 kom.	12,6 kg
Građevinska kolica Africa 85 - Točkovi Flexlite Construction Wheelbarrow Africa 85 - Wheels Flexlite	Na paleti / Drvena kutija On pallets / Wood case	1160x2300x1050mm	740kg	50 kom.	500 kom.	1000 kom.	1200 kom.	11,8 kg



LIMEX
CROATIA
WHEELBARROWS
MIXERS

Transportna kolica / Transport trolley

TK Junior

TT Junior



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Kom / paleta Pcs / pallet	Masa Weight	Dimenzije (ŠxDxV) Dimensions (WxLxH)
TK Junior TT Junior	101042	50	10,25kg	480x400x1080mm
Dimenzije pakiranja Packaging dimensions	Nosivost Capacity	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
1200x1200x2500mm	200kg	1100	Ø 25	Ø 200

TK 200

TT 200



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Kom / paleta Pcs / pallet	Masa Weight	Dimenzije (ŠxDxV) Dimensions (WxLxH)
TK 200 TT 200	101001	45	8,50kg	500x480x1110mm
Dimenzije pakiranja Packaging dimensions	Nosivost Capacity	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
1150x1200x2400mm	200kg	990	Ø 25	3.0 x 4

TK Profi

TT Profi



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Kom / paleta Pcs / pallet	Masa Weight	Dimenzije (ŠxDxV) Dimensions (WxLxH)
TK Profi TT Profi	101021	40	9,40kg	430x550x1080mm
Dimenzije pakiranja Packaging dimensions	Nosivost Capacity	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
1200x1200x2000mm	250kg	800	Ø 25	3.0 x 4

TK s klapnom

TT with flap



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Kom / paleta Pcs / pallet	Masa Weight	Dimenzije (ŠxDxV) Dimensions (WxLxH)
TK s klapnom TT with flap	101052	4	11,3kg	430x550x1080mm
Dimenzije pakiranja Packaging dimensions	Nosivost Capacity	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
1300x1200x2400mm	250kg	800	Ø 25	3.0 x 4



TK za bačve

TT for barrels




TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Kom / paleta Pcs / pallet	Masa Weight	Dimenzije (ŠxDxV) Dimensions (WxLxH)
TK za bačve TT for barrels	101048	40	10,20kg	450x520x1100mm
Dimenzije pakiranja Packaging dimensions	Nosivost Capacity	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
1200x1200x2100mm	250kg	800	Ø 25	3.0 x 4

TK 250

TT 250

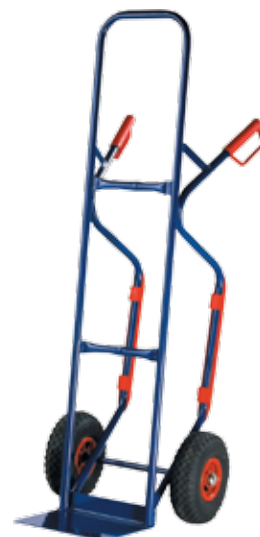

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Kom / paleta Pcs / pallet	Masa Weight	Dimenzije (ŠxDxV) Dimensions (WxLxH)
TK 250 TT 250	101011	24	10,30kg	490x530x1390mm
Dimenzije pakiranja Packaging dimensions	Nosivost Capacity	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
1550x1200x2400m	250kg	480	Ø 25	3.0 x 4

TK 250 Alu

TT 250 Alu



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Kom / paleta Pcs / pallet	Masa Weight	Dimenzije (ŠxDxV) Dimensions (WxLxH)
TK 250 Alu TT 250 Alu	101032	24	6,80kg	490x510x1315mm
Dimenzije pakiranja Packaging dimensions	Nosivost Capacity	Kom / šleper Pcs / truck	Okvir Frame	Kotač Wheel
1550x1200x2400mm	200kg	480	Ø 25	3.0 x 4

TK 6 kotača

TT 6 wheels



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Kom / paleta Pcs / pallet	Masa Weight	Dimenzije (ŠxDxV) Dimensions (WxLxH)
TK - 6 kotača TT - 6 wheels	101013	24	14,90kg	490x530x1390mm
Dimenzije pakiranja Packaging dimensions	Nosivost Capacity	Kom / šleper Pcs / truck	Okvir Frame	Kotač / wheel
1550x1200x2400mm	250kg	480	Ø 25	Ø 160



LIMEX
CROATIA
WHEELBARROWS
MIXERS



POLAND
BETONIARKI
ZAGĘSZCZARKI
PRZECINARKI
TACZKI



MK260B



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Ukupni kapacitet bubnja Overall drum capacity	Maks. kapacitet miješanja Batch capacity max	Snaga Power consumption	Broj okretaja bubnja u minuti Drum revolutions	Napon Voltage	Dimenzije / mm Dimensions / mm	Masa Weight
MK260B	260 L	max 200 L	1100W	25 o/min / rpm	230V	1600 x1000x1570	162kg

MK300B



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Ukupni kapacitet bubnja Overall drum capacity	Maks. kapacitet miješanja Batch capacity max	Snaga Power consumption	Broj okretaja bubnja u minuti Drum revolutions	Napon Voltage	Dimenzije / mm Dimensions / mm	Masa Weight
MK300B	300 L	max 230 L	1500W	25 o/min / rpm	230V	1600x1000x1670	167kg



SAINT-DENIS
MATÉRIEL
POUR LE
BÂTIMENT



BI 190F

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Ukupni kapacitet bubnja Drum capacity	Maks. kapacitet miješanja Batch capacity max	Motor Engine		
BI 190F	170 L	max 150 L	* Električni motor / Monophase engine 230V/50hz/850W ** Benzinski motor / Petrol engine Kohler 4.9kW / 6.5ks/hp		
Dužina Length	Širina Width	Visina Height	Puni kotač Solid Wheel	Masa Weight	Razina buke Sound level
* 1,23m ** 1,41m	0,70m	1,44m	Ø 250mm	*75kg ** 98kg	105db



AT 350

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Kapacitet bubnja Drum capacity	Maks. kapacitet miješanja Batch capacity max	Motor Engine		
AT 350	340 L	280 L	* Električni motor / Monophase engine 230V/50hz/1,5kW/2hp ** Benzinski motor / Petrol engine Honda GX1600Q 4Kw / 5,5ks/hp		
Dužina Length	Širina Width	Visina Height	Pneumatski kotač Pneumatic Wheel	Masa Weight	Razina buke Sound level
1,91m	0,95m	1,55m	Ø 500mm	305kg	* 94dB ** 105dB



AT 480

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Kapacitet bubnja Drum capacity	Maks. kapacitet miješanja Batch capacity max	Masa Weight		
AT 480	460L	400L	* Električni motor / Monophase engine 230V/50hz / 1,5kW/2hp ** Benzinski motor / Petrol engine Honda GX1600Q 4kW / 5,5ks/hp		
Dužina Length	Širina Width	Visina Height	Pneumatski kotač Pneumatic Wheel	Težina Weigh	Razina buke Sound level
1,91m	1,05m	1,63m	Ø 500mm	350kg	* 94dB ** 105dB





LIMEX
CROATIA
WHEELBARROWS
MIXERS

Ručni mješač RL 1000

Handheld agitator RL 1000

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Kapacitet mješanja Mixing capacity	Lopatica Paddle
Ručni mješač RL 1000 Handheld agitator RL1000	230V-50Hz	P, 950W	≤ 40 L	Ø 120mm
Duljina lopatice Length of mixing paddle	Tip zaštite Protection class	Brzina vrtnje Revolution speed	Masa Weight	Dimenzije pakiranja Packing dimensions
590mm	IP20	0-1100 min ⁻¹	Neto/N.W. 3,7kg Bruto/G.W. 4,4kg	365x275x185mm



Ručni mješač RL 1400

Handheld agitator RL 1400

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Kapacitet mješanja Mixing capacity	Lopatica Paddle
Ručni mješač RL 1400 Handheld agitator RL1400	230V-50Hz	P, 1350W	≤ 65 L	Ø 140mm
Duljina lopatice Length of mixing paddle	Tip zaštite Protection class	Brzina vrtnje Revolution speed	Masa Weight	Dimenzije pakiranja Packing dimensions
590mm	IP20	I: 0-570 min ⁻¹ II: 0-760 min ⁻¹	Neto/N.W. 5,2kg Bruto/G.W. 6,2kg	370x320x245mm



Ručni mješač RL 1600 G

Handheld agitator RL 1600 G

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Kapacitet mješanja Mixing capacity	Lopatica Paddle
Ručni mješač RL 1600 G Handheld agitator RL1600 G	230V-50Hz	P, 1600W	ca. 90 L	A: Ø 140mm B: Ø 114mm
Duljina lopatice Length of mixing paddle	Tip zaštite Protection class	Brzina vrtnje Revolution speed	Masa Weight	Dimenzije pakiranja Packing dimensions
570mm	IP20	A: 290-480 min ⁻¹ B: 380-620 min ⁻¹	Neto/N.W. 5,5kg Bruto/G.W. 6,5kg	620x300x230mm



Ručni mješač RW 1400

Handheld agitator RW 1400

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Kapacitet mješanja Mixing capacity	Lopatica Paddle
Ručni mješač RW 1400 Handheld agitator RW1400	230V-50Hz	P, 1350W	≤ 65 L	Ø 120mm
Duljina lopatice Length of mixing paddle	Tip zaštite Protection class	Brzina vrtnje Revolution speed	Masa Weight	Dimenzije pakiranja Packing dimensions
590mm	IP20	I: 0-620 min ⁻¹ II: 0-810 min ⁻¹	N.W. 5,6kg G.W. 6,3kg	370x320x240mm



ATIKA
BETONMISCHER
GARTENGERÄTE
HOLZBEARBEITUNG



Ručni mješač RW 1600 A

Handheld agitator RW 1600 A

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Kapacitet mješanja Mixing capacity	Lopatica Paddle
Ručni mješač RW 1600 A Handheld agitator RL 1600 A	230V-50Hz	P, 1600W	≤ 90 L	Ø 140mm
Duljina lopatice Length of mixing paddle	Tip zaštite Protection class	Brzina vrtnje Revolution speed	Masa Weight	Dimenzije pakiranja Packing dimensions
590mm	IP20	I: 0-380 min ⁻¹ II: 0-660 min ⁻¹	Neto/N.W. 6,7kg Bruto/G.W. 8,0kg	440x380x260mm



Ručni mješač Profi RW 1800-2

Handheld agitator Profi RW 1800-2

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Kapacitet mješanja Mixing capacity	Lopatica Paddle
Ručni mješač Profi RW 1800-2 Handheld agitator Profi RW 1800-2	230V-50Hz	P, 1800W	≤ 90 L	Ø 160mm
Duljina lopatice Length of mixing paddle	Tip zaštite Protection class	Brzina vrtnje Revolution speed	Masa Weight	Dimenzije pakiranja Packing dimensions
600mm	IP20	I: 150-300 min ⁻¹ II: 300-650 min ⁻¹	Neto/N.W. 7,5kg Bruto/G.W. 9,0kg	620x340x240mm

Ručni mješač RW 1800 Twin

Handheld agitator RW 1800 Twin

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Kapacitet mješanja Mixing capacity	Lopatica Paddle
Ručni mješač RW 1800 Handheld agitator RW 1800	230V-50Hz	P, 1800W	≤ 90 L	Ø 220mm
Duljina lopatice Length of mixing paddle	Tip zaštite Protection class	Brzina vrtnje Revolution speed	Masa Weight	Dimenzije pakiranja Packing dimensions
570mm	IP20	A: 0-450 min ⁻¹ B: 0-790 min ⁻¹	Neto/N.W. 7,5kg Bruto/G.W. 8,5kg	590x320x250mm



Zidna brusilica WS 225

Dry wall sander WS 225

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Brusna ploča Grinding disc
Zidna brusilica WS 225 Dry wall sander WS 225	230V-50Hz	P, 710W	Ø 225mm
Brusna ploča / brzina Grinding disc / speed	Masa Weight	Dimenzije pakiranja Packing dimensions	
0-1200 min ⁻¹	Neto/N.W. 3,8kg Bruto/G.W. 7,5kg	940x330x180mm	



LIMEX
CROATIA
WHEELBARROWS
MIXERS

Građevinska kružna pila BTU 450

Construction circular saw BTU 450

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Rezna ploča od tvrdog metala Hard metal saw blade
Građevinska kružna pila BTU 450 Construction circular saw BTU 450	230V-50Hz	P, 3000W P, 2200W	Ø 450 x 2,8/3,8 x Ø 30mm-40 zubi/teeth
	400V-50Hz	P, 4400W P, 3500W	

Masa Weight	Dimenzije pakiranja Packing dimensions
Neto/N.W. 90,0kg Bruto/G.W. 92,0kg Neto/N.W. 90,0kg Bruto/G.W. 90,0kg	1060x770x250mm 1000x660x1130mm



Građevinska kružna pila BTK 400

Construction circular saw BTK 400

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power
Građevinska kružna pila BTK 400 Construction circular saw BTK 400	230V-50Hz	P, 3000W
	400V-50Hz	P, 2200W P, 4400W P, 3500W
Rezna ploča od tvrdog metala Hard metal saw blade	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 400 x 2,8/3,8 x Ø 30 mm - 28 zubi / teeth	Neto/N.W. 108,0kg Bruto/G.W. 108,0kg	1050x750x1130mm

Građevinska kružna pila BTK 450

Construction circular saw BTK 450

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power
Građevinska kružna pila BTK 450 Construction circular saw BTK 450	400V-50Hz	P, 5000W P, 4000W
Rezna ploča od tvrdog metala Hard metal saw blade	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 450 x 2,8/3,8 x Ø 30 mm - 40 zubi / teeth	Neto/N.W. 110,0kg Bruto/G.W. 110,0kg	1050x750x1130mm





ATIKA
BETONMISCHER
GARTENGERÄTE
HOLZBEARBEITUNG



Građevinska kružna pila BTK 500

Construction circular saw BTK 500

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power
Građevinska kružna pila BTK 500 Construction circular saw BTK 500	400V-50Hz	P, 6100W P, 5000W
Rezna ploča od tvrdog metala Hard metal saw blade	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 500 x 4,0/2,8 x Ø 30 mm - 36 zubi / teeth	Neto/N.W. 114,0kg Bruto/G.W. 114,0kg	1050x750x1130mm

Građevinska kružna pila BTH 400

Construction circular saw BTH 400

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power
Građevinska kružna pila BTH 400 Construction circular saw BTH 400	230V-50Hz 400V-50Hz	P, 3000W P, 2200W P, 4400W P, 3500W
Rezna ploča od tvrdog metala Hard metal saw blade	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 400 x 2,8/3,8 x Ø 30 mm - 28 zubi / teeth	Neto/N.W. 138,0kg Bruto/ G.W. 138,0kg	1050x750x1130mm



Građevinska kružna pila BTH 450

Construction circular saw BTH 450

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power
Građevinska kružna pila BTH 450 Construction circular saw BTH 450	400V-50Hz	P, 5000W P, 4000W
Rezna ploča od tvrdog metala Hard metal saw blade	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 400 x 2,8/3,8 x Ø 30 mm - 40 zubi / teeth	Neto/N.W. 140,0kg Bruto/G.W. 140,0kg	1050x750x1130mm



Građevinska kružna pila BTH 500

Construction circular saw BTH 500

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power
Građevinska kružna pila BTH 500 Construction circular saw BTH 500	400V-50Hz	P, 6100W P, 5000W
Rezna ploča od tvrdog metala Hard metal saw blade	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 500 x 4,0/2,8 x Ø 30 mm - 36 zubi / teeth	Neto/N.W. 144,0kg Bruto/G.W. 144,0kg	1050x750x1130mm



Nagibna kružna pila HT 315

Bench saw HT 315

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Nagib pile Tilting arbor	Rezna ploča od tvrdog metala Hard metal saw blade
Nagibna kružna pila HT 315 Bench saw HT 315	230V-50Hz	P, 2000W P, 3000W	0°-45°	Ø 315 x 2,2/3,0 x Ø 30 mm - 40 zubi / teeth
	440V-50Hz	P, 3300W		

Masa Weight	Dimenzije pakiranja Packing dimensions
Neto/N.W. 40,0kg Bruto/G.W. 42,5kg Neto/N.W. 46,0kg Bruto/G.W. 48,5kg	800x600x180mm
Neto/N.W. 43,0kg Bruto/G.W. 45,5kg	



Nagibna kružna pila T 250 ECO-2

Bench saw T 250 ECO-2

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Nagib pile Tilting arbor
Nagibna kružna pila T 250 ECO-2 Bench saw T 250 ECO-2	230V-50Hz	P, 1800W	0°-45°

Rezna ploča od tvrdog metala Hard metal saw blade	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 250 x 1,8/2,8 x Ø 30 mm - 24 zuba / teeth	Neto/N.W. 17,3kg Bruto/G.W. 19,7kg	710x560x320mm



Nagibna kružna pila T 250 N-2

Bench saw T 250 N-2

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Nagib pile Tilting arbor
Nagibna kružna pila T 250 N-2 Bench saw T 250 N-2	230V-50Hz	P, 2000W	0°-45°

Rezna ploča od tvrdog metala Hard metal saw blade	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 250 x 1,8/2,8 x Ø 30 mm - 40 zubi / teeth	Neto/N.W. 21,0kg Bruto/G.W. 24,0kg	710x560x320mm



ATIKA
BETONMISCHER
GARTENGERÄTE
HOLZBEARBEITUNG



Skupljač prašine ABS 2000

Dust collector ABS 2000

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power
Skupljač prašine ABS 2000 Dust collector ABS 2000	230V-50Hz	P, 550W
Kapacitet vrećice Capacity of collecting bag	Masa Weight	Dimenzije pakiranja Packing dimensions
65L	Neto/N.W. 22,0kg Bruto/G.W. 24,0kg	895x540x440mm



Tračna pila BS 205-2

Band saw BS 205-2

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Zubi po inču Teeth per inch
Tračna pila BS 205-2 Band saw BS 205-2	230V-50Hz	P, 250W	6 (6,5 x 0,35 mm)
Duljina tračne pile Length of band saw	Brzina rezanja Cutting speed	Masa Weight	Dimenzije pakiranja Packing dimensions
1400mm	15m/sek.	Neto/N.W. 16,0kg Bruto/G.W. 18,0kg	720x275x350mm



Maketarska pila DKV 400-2

Scroll saw DKV 400-2

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power
Maketarska pila DKV 400-2 Scroll saw DKV 400-2	230V-50Hz	P, 120W
Brzina rezanja Cutting speed	Masa Weight	Dimenzije pakiranja Packing dimensions
500-1700 min ⁻¹	Neto/N.W. 12,7kg Bruto/G.W. 14,0kg	655x285x365mm



Tračna pila BSV 315

Band saw BSV 315

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Zubi po inču Teeth per inch
Tračna pila BSV 315 Band saw BSV 315	230V-50Hz	P, 740W	4 (12,5 x 0,5 mm)
Duljina tračne pile Length of band saw	Brzina rezanja Cutting speed	Masa Weight	Dimenzije pakiranja Packing dimensions
2240mm	370 - 800m/min.	Neto/N.W. 50,5kg Bruto/G.W. 55,0kg	1125x360x490mm

Stolna blanjalica ADH 204

Surface planing & thickening machine ADH 204

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja valjaka za rezanje Revolution speed of cutting roller
Stolna blanjalica ADH 204 Surface planing & thickening ADH 204	230V-50Hz	P, 1500W	9000 min ⁻¹
Brzina stanjivanja Feed rate for thickening	Veličina radnog materijala Size of work piece	Masa Weight	Dimenzije pakiranja Packing dimensions
v = 6m/min	max. 5-120 x 204mm	Neto/N.W. 26,5kg Bruto/G.W. 30,5kg	850x460x435mm



Kutna pila KGS 210 N

Crosscut and mitre saw KGS 210 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja Revolution speed	
Kutna pila KGS 210 N Crosscut and mitre saw KGS 210 N	230V-50Hz	P, 1400W	5000 min ⁻¹	
Rezna ploča od tvrdog metala Hard metal saw blade	Nagib pile Tilting arbor	Veličina radnog materijala Size of work piece	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 210 x 2,8 x Ø 25,4 mm - 24 zuba / teeth	0° - 45°	max. 50x120mm	Neto/N.W. 6,2kg Bruto/G.W. 7,1kg	475x290x290mm

Kutna pila KGSZ 210

Crosscut and mitre saw KGSZ 210

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja Revolution speed	
Kutna pila KGSZ 210 Crosscut and mitre saw KGSZ 210	230V-50Hz	P, 1800W	4800 min ⁻¹	
Rezna ploča od tvrdog metala Hard metal saw blade	Nagib pile Tilting arbor	Veličina radnog materijala Size of work piece	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 210 x 2,5 x Ø 30 mm - 24 zuba / teeth	0° - 45°	max. 65x205mm	Neto/N.W. 13,5kg Bruto/G.W. 15,5kg	580x450x400mm



Kutna pila KGSZ 210 s postoljem

Crosscut and mitre saw KGSZ 210 with base frame

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja Revolution speed
Kutna pila K6SZ 210 s postoljem Crosscut and mitre saw K6SZ 210 with base frame	230V-50Hz	P, 1800W	4800 min ⁻¹

Rezna ploča od tvrdog metala Hard metal saw blade	Nagib pile Tilting arbor	Veličina radnog materijala Size of work piece	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 210 x 2,5 x Ø 30 mm - 24 zuba / teeth	0° - 45°	max. 65x205mm	Neto/N.W. 20,0kg Bruto/G.W. 22,5kg	580x450x400mm



ATIKA
BETONMISCHER
GARTENGERÄTE
HOLZBEARBEITUNG



Kutna pila KGSZ 305 N

Crosscut and mitre saw KGSZ 305 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja Revolution speed
Kutna pila KGSZ 305 N Crosscut and mitre saw KGSZ 305 N	230V-50Hz	P, 2100W	4000 min ⁻¹

Rezna ploča od tvrdog metala Hard metal saw blade	Nagib pile Tilting arbor	Veličina radnog materijala Size of work piece	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 305 x 2,8 x Ø 30 mm - 60 zuba / teeth	0° - 45°	max. 100x300mm	Neto/N.W. 16,0kg Bruto/ G.W. 20,0kg	800x575x475mm



Kutna pila KGSZ 305

Crosscut and mitre saw KGSZ 305

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja Revolution speed	
Kutna pila KGSZ 305 Crosscut and mitre saw KGSZ 305	230V-50Hz	P, 2000W	4200 min ⁻¹	
Rezna ploča od tvrdog metala Hard metal saw blade	Nagib pile Tilting arbor	Veličina radnog materijala Size of work piece	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 305 x 3,0 x Ø 25,4 mm - 80 zuba / teeth	0° - 45°	max. 90x310mm	Neto/N.W. 18,0kg Bruto/G.W. 21,0kg	760x580x490mm



Kutna pila KGSZ 305 s postoljem

Crosscut and mitre saw KGSZ 305 with base frame

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja Revolution speed	
Kutna pila KGSZ 305 s postoljem Crosscut and mitre saw KGSZ 305 with base frame	230V-50Hz	P, 2000W	4200 min ⁻¹	
Rezna ploča od tvrdog metala Hard metal saw blade	Nagib pile Tilting arbor	Veličina radnog materijala Size of work piece	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 305 x 3,0 x Ø 25,4 mm - 80 zuba / teeth	0° - 45°	max. 90x310mm	Neto/N.W. 23,5kg Bruto/G.W. 26,5kg	760x580x495mm



Kružna pila za pločice ST 200 N

Radial tail cutters ST 200 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja Revolution speed	Tip zaštite Protection class
Kružna pila za pločice ST 200 N Radial tail cutters ST 200 N	230V-50Hz	P, 800W	3000 min ⁻¹	IP54
Dijamantna rezna ploča Diamond cutting disc	Nagib pile Tilting arbor	Veličina radnog materijala Size of work piece	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 200 x 2,2 x Ø 25,4mm	0° - 45°	max. 30x500mm	Neto/N.W. 26,0kg Bruto/G.W. 28,0kg	900x485x360mm

Kružna pila za pločice ST 300

Radial tail cutters ST 300

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja Revolution speed	Tip zaštite Protection class
Kružna pila za pločice ST 300 Radial tail cutters ST 300	230V-50Hz	P, 1500W	2950 min ⁻¹	IP54
Dijamantna rezna ploča Diamond cutting disc	Nagib pile Tilting arbor	Veličina radnog materijala Size of work piece	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 300 x 2,2 x Ø 25,4mm	0° - 45°	max. 70x700mm	Neto/N.W. 63,0kg Bruto/G.W. 72,5kg	1130x750x660mm



Odvlaživač zraka ALE 300 N

Dehumidifier ALE 300 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Tip zaštite Protection class	Izlaz zraka Air output
Odvlaživač zraka ALE 300 N Dehumidifier ALE 300 N	230V-50Hz	P, 700W	IPX0	350m ³ /h
Razina odvlaživanja Rating of dehumidification	Kapacitet spremnika za vodu Capacity of water tank		Masa Weight	Dimenzije pakiranja Packing dimensions
30L/ 24 h	max 5,0 L		Neto/N.W. 27,0kg Bruto/G.W. 30,kg	568x383x672mm



Odvlaživač zraka ALE 500 N

Dehumidifier ALE 500 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Tip zaštite Protection class	Izlaz zraka Air output
Odvlaživač zraka ALE 500 N Dehumidifier ALE 500 N	230V-50Hz	P, 900W	IPX0	350m ³ /h
Razina odvlaživanja Rating of dehumidification	Kapacitet spremnika za vodu Capacity of water tank	Masa Weight	Dimenzije pakiranja Packing dimensions	
50L / 24 h	max 5,8 L	Neto/N.W. 30,0kg Bruto/G.W. 33,0kg	610x405x660mm	



Odvlaživač zraka ALE 600 N

Dehumidifier ALE 600 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Tip zaštite Protection class	Izlaz zraka Air output
Odvlaživač zraka ALE 600 N Dehumidifier ALE 600 N	230V-50Hz	P, 1000W	IPX0	680m ³ /h
Razina odvlaživanja Rating of dehumidification	Kapacitet spremnika za vodu Capacity of water tank	Masa Weight	Dimenzije pakiranja Packing dimensions	
60L / 24 h	max 5,8 L	Neto/N.W. 51,5kg Bruto/G.W. 55,5kg	580x530x1035mm	





ATIKA
BETONMISCHER
GARTENGERÄTE
HOLZBEARBEITUNG



Odvlaživač zraka ALE 800 N

Dehumidifier ALE 800 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Tip zaštite Protection class	Izlaz zraka Air output
Odvlaživač zraka ALE 800 N Dehumidifier ALE 800 N	230V-50Hz	P, 1200W	IPX0	680m ³ /h
Razina odvlaživanja Rating of dehumidification	Kapacitet spremnika za vodu Capacity of water tank	Masa Weight	Dimenzije pakiranja Packing dimensions	
80L/ 24 h	max 5,8 L	Neto/N.W. 53,5kg Bruto/G.W. 57,0kg	580x530x1035mm	



Grijač za terasu Festival

Patio heater Festival

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Vrsta plina Type of gas	Toplinska snaga Heat output
Grijač za terasu Patio heater Festival	Propan / Butan	4,0kW-11,0kW
Masa Weight	Dimenzije pakiranja Packing dimensions	
Neto/N.W. 26,0kg Bruto/G.W. 29,5kg	1190x790x305mm	



Mjerač vlage FM 2

Moisture meter FM 2

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon baterije Battery voltage	Vlaga drveta Wood moisture	Vlaga građevine Building moisture
Mjerač vlage FM 2 Moisture meter FM 2	9V	8-60%	0,3 - 2,0%
Temperatura Temperature	Masa Weight	Dimenzije pakiranja Packing dimensions	
0 - 40°C	Neto/N.W. 0,1kg Bruto/G.W. 0,2kg	230x152x35mm	



Vrtna drobilica AMA 2500

Garden shredder AMA 2500

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja Revolution speed
Vrtna drobilica AMA 2500 Garden shredder AMA 2500	230V-50Hz	P, 2500W	2800 min ⁻¹
Promjer grane Branch diameter	Masa Weight	Dimenzije pakiranja Packing dimensions	
Ø 40mm	Neto/N.W. 18,5kg Bruto/G.W. 21,0kg	550x320x580mm	





Vrtna drobilica AMF 2800

Garden shredder AMF 2800

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja Revolution speed
Vrtna drobilica AMF 2800 Garden shredder AMF 2800	230V-50Hz	P, 2800W	2800 min ⁻¹
Kapacitet spremnika Capacity of collecting box	Promjer grane Branch diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
60L	Ø 45mm	Neto/N.W. 24,0kg Bruto/G.W. 26,5kg	575x420x505mm



Tiha drobilica ALA 2500

Silent shredder ALA 2500

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja valjaka za rezanje Revolution speed of cutting roller
Tiha drobilica ALA 2500 Silent shredder ALA 2500	230V-50Hz	P, 2500W	40 min ⁻¹
Promjer grane Branch diameter	Masa Weight	Dimenzije pakiranja Packing dimensions	
Ø 40mm	Neto/N.W. 24,5kg Bruto/G.W. 26,5kg	570x330x610mm	

Tiha drobilica ALF 2600

Silent shredder ALF 2600

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja valjaka za rezanje Revolution speed of cutting roller
Tiha drobilica ALF 2600 Silent shredder ALF 2600	230V-50Hz	P, 2600W	40 min ⁻¹
Kapacitet spremnika Capacity of collecting box	Promjer grane Branch diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
60 L	Ø 40mm	Neto/N.W. 28,0kg Bruto/G.W. 30,0kg	600x387x445mm



Tiha drobilica ALF 2600-2

Silent shredder ALF 2600-2

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja valjaka za rezanje Revolution speed of cutting roller
Tiha drobilica ALF 2600-2 Silent shredder ALF 2600-2	230V-50Hz	P, 2600W	40 min ⁻¹
Kapacitet spremnika Capacity of collecting box	Promjer grane Branch diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
55 L	Ø 40mm	Neto/N.W. 26,0kg Bruto/G.W. 28,0kg	600x382x515mm



ATIKA
BETONMISCHER
GARTENGERÄTE
HOLZBEARBEITUNG



Tiha drobilica LHF 2800

Silent shredder LHF 2800

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja valjaka za rezanje Revolution speed of cutting roller
Tiha drobilica LHF 2800 Silent shredder LHF 2800	230V-50Hz	P, 2800W	40 min ⁻¹
Kapacitet spremnika Capacity of collecting box	Promjer grane Branch diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
62 L	Ø 45mm	Neto/N.W. 31,0kg Bruto/G.W. 34,0kg	585x425x520mm



Tiha drobilica ALF 2800

Silent shredder ALF 2800

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Broj okretaja valjaka za rezanje Revolution speed of cutting roller
Tiha drobilica ALF 2800 Silent shredder ALF 2800	230V-50Hz	P, 2800W	40 min ⁻¹
Kapacitet spremnika Capacity of collecting box	Promjer grane Branch diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
62 L	Ø 45mm	Neto/N.W. 31,0kg Bruto/G.W. 34,0kg	585x425x520mm

Benzinska vrtna drobilica GHB 760 A

Petrol garden shredder GHB 760 A

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Vrsta motora Engine	Snaga Power	Obujam motora Engine capacity	Brzina vrtnje Revolution speed
Bezinska vrtna drobilica GHB 760 A Petrol garden shredder GHB 760 A	4-takt Benzin/Petrol	4,00kW	212cm ³	3600 min ⁻¹
Brzina vrtnje rezne ploče Revolution speed of blade disc	Promjer grane Branch diameter	Masa Weight	Dimenzije pakiranja Packing dimensions	
62 L	Ø 76mm	Neto/N.W. 84,5kg Bruto/G.W. 92,0kg	785x555x1130mm	



Električne škare za živicu HA 500/51

Hedge trimmer HA 500/51

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Duljina noža Blade length	Duljina reza Cutting length
Električne škare za živicu HA 500/51 Hedge trimmer HA 500/51	230V-50Hz	P, 500W	510mm	460mm
Debljina grane za rezanje Branch thickness	Masa Weight		Dimenzije pakiranja Packing dimensions	
16mm	Neto/N.W. 2,2kg Bruto/G.W. 2,6kg		840 x 109 x 185mm	





Električne škare za živicu HA 710/61

Hedge trimmer HA 710/61

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Duljina noža Blade length	Duljina reza Cutting length
Električne škare za živicu HA 710/61 Hedge trimmer HA 710/61	230V-50Hz	P, 710W	610mm	560mm
Debljina grane za rezanje Branch thickness	Masa Weight		Dimenzije pakiranja Packing dimensions	
24mm	Neto/N.W. 3,4kg Bruto/G.W. 3,8kg		1065 x 175 x 210mm	



Motorne škare za živicu HB 60-2

Petrol - Hedge trimmer HB 60-2

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Vrsta motora Engine	Snaga Power	Duljina noža Blade length	Duljina reza Cutting length	Paljenje Spark ignition
Motorne škare za živicu HB 60-2 Petrol - Hedge trimmer HB 60-2	2-taktni motor 2-stroke petrol engine	0,75kW	600mm	550mm	Elektronski Electronic
Obujam motora Engine capacity	Debljina grane za rezanje Branch thickness	Masa Weight	Dimenzije pakiranja Packing dimensions		
25,4cm ³	28mm	Neto/N.W. 6,3kg Bruto/G.W. 8,9kg	1160 x 255 x 220mm		



Motorne škare za živicu HB 72-2

Petrol - Hedge trimmer HB 72-2

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Vrsta motora Engine	Snaga Power	Duljina noža Blade length	Duljina reza Cutting length	Paljenje Spark ignition
Motorne škare za živicu HB 72-2 Petrol - Hedge trimmer HB 72-2	2-taktni motor 2-stroke petrol engine	0,75kW	800mm	720mm	Elektronski Electronic
Obujam motora Engine capacity	Debljina grane za rezanje Branch thickness	Masa Weight	Dimenzije pakiranja Packing dimensions		
25,4 cm ³	28mm	Neto/N.W. 6,5kg Bruto/G.W. 9,3kg	1360 x 255 x 220mm		



Teleskopske škare za živicu HHS 710/56

Telescopic hedge trimmer HHS 710/56

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Duljina noža Blade length	Duljina reza Cutting length
Teleskopske škare za živicu HHS 710/56 Telescopic hedge trimmer HHS 710/56	230 V ~ 50Hz	P, 710W	560mm	510mm
Debljina grane za rezanje Branch thickness	Masa Weight	Dimenzije pakiranja Packing dimensions		
27mm	Neto/N.W. 4,9kg Bruto/G.W. 5,5kg	1065 x 260 x 135mm		





ATIKA
BETONMISCHER
GARTENGERÄTE
HOLZBEARBEITUNG



Teleskopske motorne škare za živicu BHH 30

Telescopic Petrol - pole hedge trimmer BHH 30

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Vrsta motora Engine	Snaga Power	Duljina noža Blade length	Duljina reza Cutting length	Paljenje Spark ignition
Teleskopske motorne škare za živicu BHH 30 Telescopic Petrol - pole hedge trimmer BHH 30	2-taktni motor 2-stroke petrol engine	1,00kW	425mm	400mm	Elektronski Electronic

Obujam motora Engine capacity	Debljina grane za rezanje Branch thickness	Masa Weight	Dimenzije pakiranja Packing dimensions
29,7 cm ³	24mm	Neto/N.W. 6,7kg Bruto/G.W. 9,1kg	1480 x 260 x 280mm



Teleskopska pila KSH 710 SDS

Power pruner KSH 710 SDS

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Duljina reza Cutting length	Brzina rezanja Cutting speed
Teleskopska pila KSH 710 SDS Power pruner KSH 710 SDS	230 V ~ 50Hz	P, 710W	180mm	13m/s

Podmazivanje lanca Saw chain oiling	Nagib lanca Saw chain pitch	Masa Weight	Dimenzije pakiranja Packing dimensions
Automatski Automatic	9,52mm (3/8")	Neto/N.W. 4,6kg Bruto/G.W. 5,6kg	1190 x 155 x 170mm



Teleskopske motorne škare BKSH 30

Petrol power pruner BKSH 30

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Vrsta motora Engine	Snaga Power	Duljina reza Cutting length	Brzina rezanja Cutting speed	Paljenje Spark ignition
Teleskopske motorne škare za živicu BKSH 30 Petrol - pole hedge trimmer BKSH 30	2-taktni motor 2-stroke petrol engine	1,00kW	255mm	22m/s	Elektronski Electronic

Obujam motora Engine capacity	Podmazivanje lanca Saw chain oiling	Nagib lanca Saw chain pitch	Masa Weight	Dimenzije pakiranja Packing dimensions
29,7 cm ³	Automatski Automatic	9,52mm (3/8")	Neto/N.W. 7,5kg Bruto/G.W. 10,0kg	1580 x 260 x 280mm



Motorna pila KS 1800/35

Chain saw KS 1800/35

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Duljina reza Cutting length	Brzina rezanja Cutting speed
Motorna pila KS 1800/35 Chain saw KS 1800/35	230 V ~ 50Hz	P, 1800W	356mm	13,5m/s

Podmazivanje lanca Saw chain oiling	Nagib lanca Saw chain pitch	Masa Weight	Dimenzije pakiranja Packing dimensions
Automatski Automatic	9,52mm (3/8")	Neto/N.W. 4,5kg Bruto/G.W. 5,3kg	500 x 260 x 200mm



Motorna pila KS 2002/40

Chain saw KS 2002/40

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Duljina reza Cutting length	Brzina rezanja Cutting speed
Motorna pila KS 2002/40 Chain saw KS 2002/40	230V ~ 50Hz	P, 2000W	400mm	13,5m/s

Podmazivanje lanca Saw chain oiling	Nagib lanca Saw chain pitch	Masa Weight	Dimenzije pakiranja Packing dimensions
Automatski Automatic	9,52mm (3/8")	Neto/N.W. 5,7kg Bruto/G.W. 6,5kg	500 x 290 x 200mm



Motorna pila KS 2402/40

Chain saw KS 2402/40

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Duljina reza Cutting length	Brzina rezanja Cutting speed
Motorna pila KS 2402/40 Chain saw KS 2402/40	230V ~ 50Hz	P, 2400W	400mm	14m/s

Podmazivanje lanca Saw chain oiling	Nagib lanca Saw chain pitch	Masa Weight	Dimenzije pakiranja Packing dimensions
Automatski Automatic	9,52mm (3/8")	Neto/N.W. 5,7kg Bruto/G.W. 6,5kg	500 x 290 x 200mm



Benzinska motorna pila BKS 38 A

Petrol chain saw BKS 38 A

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Vrsta motora Engine	Snaga Power	Obujam motora Engine capacity	Duljina reza Cutting length	Brzina rezanja Cutting speed
Motorna pila BKS 38 A Petrol chain saw BKS 38 A	2-taktni motor 2-stroke petrol engine	1,30kW	37,2cm ³	370mm	21m/s

Podmazivanje lanca Saw chain oiling	Nagib lanca Saw chain pitch	Masa Weight	Dimenzije pakiranja Packing dimensions
Automatski Automatic	9,52mm (3/8")	Neto/N.W. 5,2kg Bruto/ G.W. 6,6kg	410 x 265 x 290mm



Benzinska motorna pila BKS 45-2

Petrol chain saw BKS 45-2

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Vrsta motora Engine	Snaga Power	Obujam motora Engine capacity	Duljina reza Cutting length	Brzina rezanja Cutting speed
Motorna pila BKS 45-2 Petrol Chain saw BKS 45-2	2-taktni motor 2-stroke petrol engine	1,80kW	45,1cm ³	430mm	21,2m/s

Podmazivanje lanca Saw chain oiling	Nagib lanca Saw chain pitch	Masa Weight	Dimenzije pakiranja Packing dimensions
Automatski Automatic	8,255mm (0,325")	Neto/N.W. 6,7kg Bruto/ G.W. 7,9kg	480 x 270 x 310mm





ATIKA
BETONMISCHER
GARTENGERÄTE
HOLZBEARBEITUNG



Stroj za oštrenje lanca KSG 220 A

Electric chain sharpener KSG 220 A

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Brzina vrtnje Grinding disc speed
Stroj za oštrenje lanca KSG 220 A Electric chain sharpener KSG 220 A	230V ~ 50Hz	P, 220W	~ 40m/s

Brusna ploča Grinding disc	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø100 x 3,2 x Ø10mm	Neto/N.W. 1,7kg Bruto/G.W. 2,0kg	275 x 180 x 185mm



Sklopivi stalak za piljenje drva

Sawhorse

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Nosivost Carrying capacity	Masa Weight	Dimenzije pakiranja Packing dimensions
Sklopivi stalak za piljenje drva Sawhorse	max. 150kg	Neto/N.W. 6,6kg Bruto/G.W. 7,0kg	1032 x 161 x 38mm



Pila za drva BWS 400

Log saw BWS 400

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Metalna pila Hard metal saw blade
Pila za drva BWS 400 Log saw BWS 400	230V ~ 50Hz	P, 1800W	Ø 400mm

Dubina rezanja Cutting depth	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 120mm	Neto/N.W. 35,5kg Bruto/G.W. 39,0kg	1000 x 840 x 290mm



Pila za drva BWS 500

Log saw BWS 500

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Metalna pila Hard metal saw blade
Pila za drva BWS 500 Log saw BWS 500	230V ~ 50Hz	P, 3000W	Ø 500mm

Dubina rezanja Cutting depth	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 180mm	Neto/N.W. 56,5kg Bruto/G.W. 60,0kg	890 x 850 x 520mm



Pila za drva BWS 700 N

Log saw BWS 700 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Metalna pila Hard metal saw blade
Pila za drva BWS 700 N Log saw BWS 700 N	230V ~ 50Hz	P, 4500W	Ø 700mm

Dubina rezanja Cutting depth	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 240mm	Neto/N.W. 98,0kg Bruto/G.W. 134,0kg	1340 x 940 x 1200mm



Cjepač drva ASP 4 N

Log splitter ASP 4 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Sila cjepanja Splitting force	Udar Stroke
Cjepač za drva ASP 4 N Log splitter ASP 4 N	230V ~ 50 H	P, 1500W	50kN (5 t)	max. 370mm

Duljina trupca Log length	Promjer trupca Log diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
max. 520mm	Ø 50 - 250mm	Neto/N.W. 43,0kg Bruto/G.W. 45,5kg	940 x 270 x 510mm



Cjepač drva ASP 4 N

Log splitter ASP 4 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Sila cjepanja Splitting force	Udar Stroke
Cjepač za drva ASP 4 N Log splitter ASP 4 N	230V ~ 50Hz	P, 1500W	40kN (4 t)	max. 290mm

Duljina trupca Log length	Promjer trupca Log diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
max. 370mm	Ø 50 - 250mm	Neto/N.W. 38,0kg Bruto/G.W. 40,0kg	780 x 270 x 510mm



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Sila cjepanja Splitting force	Udar Stroke
Cjepač za drva ASP 5 N Log splitter ASP 5 N	230V ~ 50 H	P, 1500W	50kN (5 t)	max. 370mm

Duljina trupca Log length	Promjer trupca Log diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
max. 520mm	Ø 50 - 250mm	Neto/N.W. 43,0kg Bruto/G.W. 45,5kg	940 x 270 x 510mm



Cjepač drva ASP 5 N-UG

Log splitter ASP 5 N-UG

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Sila cjepanja Splitting force	Udar Stroke
Cjepač za drva ASP 5 N-UG Log splitter ASP 5 N-UG	230V ~ 50Hz	P, 1500W	50kN (5 t)	max. 370mm

Duljina trupca Log length	Promjer trupca Log diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
max. 520mm	Ø 50 - 250mm	Neto/N.W. 48,5kg Bruto/W. 51,0kg	780 x 270 x 510mm





ATIKA
BETONMISCHER
GARTENGERÄTE
HOLZBEARBEITUNG



Cjepač drva ASP 6 N

Log splitter ASP 6 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Sila cjepanja Splitting force	Udar Stroke
Cjepač za drva ASP 6 N Log splitter ASP 6 N	400V ³ ~ 50Hz	P, 3000	60kN (6 t)	max. 510mm

Duljina trupca Log length	Promjer trupca Log diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
max. 1050mm	Ø 120 - 300mm	Neto/N.W. 101,0kg Bruto/G.W. 108,0kg	520 x 400 x 1155mm



Cjepač drva ASP 6 L

Log splitter ASP 6 L

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Sila cjepanja Splitting force	Udar Stroke
Cjepač za drva ASP 6 L Log splitter ASP 6 L	230V ~ 50Hz	P, 2800W	60kN (6 t)	max. 500mm

Duljina trupca Log length	Promjer trupca Log diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
max. 1030mm	Ø 120 - 300mm	Neto/N.W. 103,5kg Bruto/ G.W. 112,3kg	500 x 420 x 1000mm

Cjepač drva ASP 8 N

Log splitter ASP 8 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Sila cjepanja Splitting force	Udar Stroke
Cjepač za drva ASP 8 N Log splitter ASP 8 N	400V ³ ~ 50Hz	P, 3000W	80kN (8 t)	max. 500mm

Duljina trupca Log length	Promjer trupca Log diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
max. 1050mm	Ø 120 - 300mm	Neto/N.W. 104,0kg Bruto/G.W. 1130kg	575x 400 x 1200mm



Cjepač za drva ASP 10 N

Log splitter ASP 10 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Sila cjepanja Splitting force	Udar Stroke
Cjepač za drva ASP 10 N Log splitter ASP 10 N	400V ³ ~ 50Hz	P, 4000W	100kN (10 t)	max. 525mm

Duljina trupca Log length	Promjer trupca Log diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
max. 1300mm	Ø 120 - 400mm	Neto/N.W. 175,0kg Bruto/G.W. 186,0kg	640 x 400 x 1170mm

Cjepač drva ASP 10 TS

Log splitter ASP 10 TS

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Sila cjepanja Splitting force	Udar Stroke
Cjepač za drva ASP 10 TS Log splitter ASP 10 TS	400V ³ ~ 50Hz	P, 3300W	100kN (10 t)	max. 550mm

Duljina trupca Log length	Promjer trupca Log diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
max. 1350mm	Ø 120 - 400mm	Neto/N.W. 167,0kg Bruto/G.W. 174,5kg	738 x 454 x 1230mm



Cjepač drva ASP 12 TS

Log splitter ASP 12 TS

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Sila cjepanja Splitting force	Udar Stroke
Cjepač za drva ASP 12 TS Log splitter ASP 12 TS	400V ³ ~ 50Hz	P, 3500W	120kN (12 t)	max. 550mm

Duljina trupca Log length	Promjer trupca Log diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
max. 1350mm	Ø 120 - 400mm	Neto/N.W. 175,0kg Bruto/G.W. 182,5kg	738 x 454 x 1230mm



Cjepač drva ASP 14 TS

Log splitter ASP 14 TS

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Sila cjepanja Splitting force	Udar Stroke
Cjepač za drva ASP 14 TS Log splitter ASP 14 TS	400V ³ ~ 50Hz	P, 4000W	140kN (14 t)	max. 530mm

Duljina trupca Log length	Promjer trupca Log diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
max. 1300mm	Ø 120 - 400mm	Neto/N.W. 184,0kg Bruto/G.W. 194,0kg	640 x 400 x 1180mm



Benzinski cjepač drva ASP 11 N

Petrol - Log splitter ASP 11 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Tip motora Engine	Snaga Power	Obujam motora Engine capacity	Sila cjepanja Splitting force	Udar Stroke
Benzinski cjepač drva ASP 11 N Petrol - Log splitter ASP 11 N	4-taktni motor 4-stroke petrol engine	4kW	212cm ³	110kN (11t)	max. 525mm

Duljina trupca Log length	Promjer trupca Log diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
max. 1300mm	Ø 120 - 400mm	Neto/N.W. 178,0kg Bruto/G.W. 193,5kg	900 x 445 x 1190mm





ATIKA
BETONMISCHER
GARTENGERÄTE
HOLZBEARBEITUNG



Električni orač BH 800 N

Electric tiller BH 800 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Brzina vrtnje Revolution speed
Električni orač BH 800 N Electric tiller 800 N	230V ~ 50Hz	P, 800W	400min ⁻¹
Promjer alata za okopavanje Hoing tool diameter	Radna širina Working width	Masa Weight	Dimenzije pakiranja Packing dimensions
200mm	280mm	Neto/N.W. 7,9kg Bruto/G.W. 9,0kg	510 x 355 x 305mm



Električni orač BH 1400 N

Electric tiller BH 1400 N

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Brzina vrtnje Revolution speed
Električni orač BH 1400 N Electric tiller 1400 N	230V ~ 50Hz	P, 1400W	300min ⁻¹
Promjer alata za okopavanje Hoing tool diameter	Radna širina Working width	Masa Weight	Dimenzije pakiranja Packing dimensions
200mm	400mm	Neto/N.W. 13,5kg Bruto/G.W. 15,0kg	560 x 430 x 370mm



Benzinski bušač za zemlju ELB 52

Petrol earth auger ELB 52

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Tip motora Engine	Snaga Power	Obujam motora Engine capacity
Benzinski bušač za zemlju ELB 52 Petrol earth auger ELB 52	2-taktni motor 2-spoke petrol engine	2,2kW	51,7cm ³
Paljenje Spark ignition	Masa Weight	Dimenzije pakiranja Packing dimensions	
Elektronski Electronic	Neto/N.W. 12,2kg Bruto/G.W. 20,7kg	830 x 575 x 285mm	



Stroj za rahljenje trave VT 32 Z

Scarifier / Lawn raker VT 32 Z

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

TEHNIČNI PODATKI / TECHNICAL SPECIFICATION				
Model		Napon Electric supply	Snaga Power	Dubina rezanja Cutting depth
Stroj za rahljenje trave VT 32 Z Scarifier / Lawn raker VT 32 Z		230V ~ 50Hz	P, 1400W	10mm / - 4mm
Valjak za usitnjavanje Scarifier roller	Radna širina Working width	Kapacitet posude Capacity of collecting box	Masa Weight	Dimenzije pakiranja Packing dimensions
4mm / - 10mm	320mm	35 L	Neto/N.W. 10,2kg Bruto/G.W. 12,6kg	570 x 500 x 315mm



Stroj za rahljenje trave VT 40 Z

Scarifier / Lawn raker VT 40 Z

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Dubina rezanja Cutting depth	
Stroj za rahljenje trave VT 40 Z Scarifier / Lawn raker VT 40 Z	230V ~ 50Hz	P, 1600W	15mm / - 5mm	
Valjak za usitnjavanje Scarifier roller	Radna širina Working width	Kapacitet posude Capacity of collecting box	Masa Weight	Dimenzije pakiranja Packing dimensions
10mm / - 10mm	400mm	40 L	Neto/N.W. 15,3kg Bruto/G.W. 17,2kg	670 x 510 x 320mm



Benzinski trimer sa nožem BF 31-4T

Petrol grass trimmer and brush cutter BF 31-4T



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

TEHNIČKI PODACI / TECHNICAL SPECIFICATIONS				
Model		Tip motor Engine	Snaga Power	Obujam motora Engine capacity
Benzinski trimer sa nožem BF 31-4T Patrol grass trimmer and brush cutter BF 31-4T		4-taktni motor 4-stroke petrol engine	0,7kW	31,1cm ³
Širina reza Cutting width	Promjer noža Blade diameter	Paljenje Sparking ignition	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 480	Ø 255	Elektronski Electronic	Neto/N.W. 8,5kg Bruto/G.W. 11,0kg	1080 x 300 x 310mm

Benzinski trimer sa nožem BF 43-2

Petrol grass trimmer and brush cutter BF 43-2

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model		Tip motor Engine	Snaga Power	Obujam motora Engine capacity
Benzinski trimer sa nožem BF 43-2 Patrol grass trimmer and brush cutter BF 43-2		2-taktni motor 2-stroke petrol engine	1,20kW	42,7cm ³
Širina reza Cutting width	Promjer noža Blade diameter	Paljenje Sparking ignition	Masa Weight	Dimenzije pakiranja Packing dimensions
Ø 440	Ø 255	Elektronski Electronic	Neto/N.W. 8,1kg Bruto/G.W. 10,6kg	1070 x 315 x 285mm



Električni set za održavanje vrta BMGS 30

Engine driven garden maintenance set BMGS 30

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Tip motor Engine	Snaga Power	Obujam motora Engine capacity	Duljina reza Cutting length	Brzina rezanja Cutting speed
Električni set za održavanje vrta BMGS 30 Engine driven garden maintenance set BMGS 30	2-taktni motor 2-stroke petrol engine	1,00kW	29,3cm ³	255mm	22m/s
Duljina noža škara Blade length	Duljina reza škara Cutting length	Širina reza trimera Trimmer cutting width	Promjer noža trimera Trimmer blade diameter	Masa Weight	Dimenzije pakiranja Packing dimensions
425mm	400mm	420mm	Ø230mm	Neto/N.W. 11,0kg Bruto/G.W. 13,5kg	1580 x 300 x 280mm





ATIKA
BETONMISCHER
GARTENGERÄTE
HOLZBEARBEITUNG



Puhalo lišća LSH 2500

Vacuum blower LSH 2500

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Brzina okretaja Revolution speed
Puhalo lišća LSH 2500 Vacuum blower LSH 2500	230V ~ 50Hz	P, 2500W	6000-14000min ⁻¹
Kapacitet posude Capacity of collecting box	Masa Weight	Dimenzije pakiranja Packing dimensions	
45 L	Neto/N.W. 3,6kg Bruto/G.W. 4,4kg	320 x 230 x 455mm	



Puhalo lišća LSH 2600

Vacuum blower LSH 2600

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Brzina okretaja Revolution speed
Puhalo lišća LSH 2600 Vacuum blower LSH 2600	230V ~ 50Hz	P, 2600W	6000-14000min ⁻¹
Kapacitet posude Capacity of collecting box	Masa Weight	Dimenzije pakiranja Packing dimensions	
45 L	Neto/N.W. 3,6kg Bruto/G.W. 4,4kg	320 x 230 x 455mm	



Puhalo lišća KLS 1600

Vacuum blower KLS 1600

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Electric supply	Snaga Power	Brzina okretaja Revolution speed
Puhalo lišća KLS 1600 Vacuum blower KLS 1600	230V ~ 50Hz	P, 1600W	11000min ⁻¹
Kapacitet posude Capacity of collecting box	Masa Weight	Dimenzije pakiranja Packing dimensions	
25 L	Neto/N.W. 6,8kg Bruto/G.W. 8,9kg	550 x 515 x 385mm	



Čistač HKM 680

Push sweeper HKM 680

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Radna širina Working width	Kapacitet posude Capacity of collecting box
Čistač HKM 680 Push sweeper HKM 680	680mm	12 L
Masa Weight	Dimenzije pakiranja Packing dimensions	
Neto/N.W. 9,4kg Bruto/G.W. 10,4kg	575 x 210 x 585mm	



Čistač HKM 800

Push sweeper HKM 800

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Radna širina Working width	Kapacitet posude Capacity of collecting box
Čistač HKM 800 Push sweeper HKM 800	800mm	30 L
Masa Weight	Dimenzije pakiranja Packing dimensions	
Neto/N.W. 12,7g Bruto/G.W. 14,7kg	700 x 330 x 840mm	



Poluteška vibro ploča PCLX 320 & 400

Midweight Plate Compactor PCL 320 & 400

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power	Veličina ploče Plate Size	Statički pritisak Static pressure
PCLX320 petrol Honda GX100	3.0ks/hp / 2.2 kW	320mm x 574mm	398 kg/m ²
PCLX400 petrol Honda GX100	3.0ks/hp 2.2 kW kg/m ²	400mm x 574mm	336 kg/m ²
Centrifugalna sila Centrifugal Force	Brzina puta Travel speed	Razina vibracije Vibration level	Masa Weight
13kN	20m/min.	2.42m/sec	62kg
13kN	20m/min.	2.48m/sec	66.5kg



Teška kombinirana vibro ploča PCX 12/36 & 13/40

Heavyweight Combination Plate Compactor PCX 12/36 & 13/40

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power (ks/hp / kW)	Veličina ploče (ŠxD) Plate Size (WxL)	Statički tlak Static Pressure	Centrifugalna sila Centrifugal Force	Brzina kretanja Travel Speed	Vibracija/Uporaba Vibration/usage	Masa Weight
Kompaktorne pločice sa vodenim kitom / Compactor Plates with water kit							
PCX 12/36	Honda Petrol GX120 4/3	360mm x 606mm	611kg/m ²	12.25kN	20m/min	4.74m/sec ² / 2.14h	84.5kg
PCX 13/40		400mm x 606mm	542kg/m ²	13kN		3.2m/sec ² / 4.53h	87kg
Kompaktorne pločice bez vodenog kita / Compactor Plates without water kit							
PCX 12/36	Honda Petrol GX120 4/3	360mm x 606mm	586kg/m ²	12.25kN	20m/min	4.74m/sec ² / 2.14h	81kg
PCX 13/40		400mm x 606mm	520kg/m ²	13kN		3.2m/sec ² / 4.53h	3.5kg





BELLE
LIGHT
CONSTRUCTION
EQUIPMENT



Specijalna "Delta" vibro ploča PCX 20/45 & 20/50

Special Delta Plate Compactor PCX 20/45 & 20/50

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power	Statički tlak Static Pressure	Centrifugalna sila Centrifugal Force	Brzina kretanja Travel Speed	Vibracija Vibration	Dimenzija (ŠxDxV) Dimensions (WxLxH)	Masa Weight
PCX 20/45 Honda GX160 Benzin/Petrol	5.5ks/hp / 4.0kW	463kg/m ²	20	26m/min	3.5m/sec ²	450x1167x987	91kg
PCX 20/45 Hatz 1B20 Dizel/Diesel	4.6ks/hp / 3.5kW	585kg/m ²	20	25m/min	2.64m/sec ²	450x1167x987	115kg
PCX 20/50 Honda GX160 Benzin/Petrol	5.5ks/hp / 4.0kW	442kg/m ²	20	25m/min	3.5m/sec ²	500x1167x987	97kg
PCX 20/50 Hatz 1B20 Dizel/Diesel	4.6ks/hp / 3.5kW	547kg/m ²	20	24m/min	2.45m/sec ²	500x1167x987	120kg



Teška vibro ploča PCX 450 & 500

Heavyweight Plate Compactor PCX 450 & 500

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power	Veličina ploče Plate Size	Statički pritisak Static Pressure	Centrifugalna sila Centrifugal Force	Brzina kretanja Travel Speed	Vibracija Vibration	Masa Weight
PCX benzin sa vodenim kitom/ PCX Petrol with Water Kit							
PCX 450 Honda	4ks/hp / 3kW	418mm x 470mm	382kg/m ²	16.5	23m/min	1.90m/sec ²	96kg
PCX 450 Hatz	4.6ks/hp / 3.5 kW	450mm x 696mm	440kg/m ²		22m/min	2.61m/sec ²	113kg
PCX 500 Honda	5.5ks/hp / 4.4kW	467mm x 470mm	351kg/m ²		19m/min	2.00m/sec ²	97.50kg
PCX 500 Hatz	4.6ks/hp / 3.5 kW	500mm x 696mm	404kg/m ²		19m/min	2.59m/sec ²	116kg
PCX Standardni/Asfalti benzin bez vodenog kita / PCX Standard/Asphalt Petrol without Water Kit							
PCX 450 Honda	4ks/hp / 3kW	418mm x 470mm	382kg/m ²	16.5	23m/min	1.90 m/sec ²	86kg
PCX 450 Hatz	4.6ks/ hp / 3.5kW	450mm x 696mm	440kg/m ²		33m/min	2.45 m/sec ²	110.5kg
PCX 500 Honda	5.5ks/ hp / 4.4kW	467mm x 470mm	351kg/m ²		19m/min	2.00 m/sec ²	88kg
PCX 500 Hatz	4.6ks/hp / 3.5 kW	500mm x 696mm	404kg/m ²		19m/min	2.59 m/sec ²	114kg



Kompaktna reverzibilna vibro ploča RPC 30

Compact reversible plate compactor RPC 30

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine power	Veličina ploče (ŠxD) Plate Size (WxL)	Centrifugalna sila Centrifugal Force	Frekvencija Frequency	Težinski razred Weight Class	Masa Weight
RPC 30/40	Honda GX160 Benzin/Petrol 5.5ks/hp / 4kW	400mm x 657mm	30kN	90Hz	160	158kg
RPC 30/40D	Hatz 1B20 Dizel/Diesel 4.2ks/hp / 3.1kW					170kg
RPC 30/50	Honda GX160 Benzin/Petrol 5.5ks/hp / 4kW	500mm x 657mm			200	161kg
RPC 30/50D	Hatz 1B20 Dizel/Diesel 4.2ks/hp / 3.1kW					174kg



Reverzibilna vibro ploča srednje veličine RPC 45

Medium size reversible plate compactor RPC 45

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power	Veličina ploče (ŠxD) Plate size (WxL)	Centrifugalna sila Centrifugal Force	Frekvencija Frequency	Težinski razred Weight Class	Masa Weight
RPC 45/60	Honda GX270 Benzin/Petrol 9ks/hp / 6.7kW	600mm x 839mm	45kN	70Hz	300	275kg
RPC 45/60D	Hatz 1B30 Dizel/Diesel-6.3hp/4.7kW	600mm x 839mm	45kN	70Hz	300	291kg
RPC 45/60DE Električno paljenje / Electric start						
Narančasta / Orange	Hartz 1B30 Dizel/Diesel 6.3ks/hp / 4.7kW	600mm x 839mm	45kN	70Hz	300	303kg
Žuta / Yellow						



Reverzibilna vibro ploča za najteže radove RPC 60

Heavy duty reversible plate compactor RPC 60

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power	Veličina ploče (ŠxD) Plate size (WxL)	Centrifugalna sila Centrifugal Force	Frekvencija Frequency	Težinski razred Weight Class	Masa Weight
RPC 60/80D	Hatz 1D81Z Dizel/Diesel 15ks/hp / 11kW	700mm x 945 mm	60kN	70Hz	500	475kg
RPC 60/80D Električno paljenje / Electric start						
Narančasta / Orange	Hatz 1D81Z Dizel/Diesel 15ks/hp / 11kW	700mm x 945mm	60kN	70Hz	500	505kg
Žuta / Yellow						



RTX Stupni nabijač

RTX Rammer

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power	Udaraca u minuti Blows per Minute	Tip karburatora Carburettor Type	Sila udarca Impact Force	Širina x visina x dužina Width x Height x Length	Veličina stope (ŠxD) Foot Size (WxL)	Masa Weight
RTX 50 Honda Benzin/Petrol 230mm stopa/Foot	3ks/hp / 2.3kW	450-660	Dijafragma Diaphragm	12,5kN	345mm x 975mm x 670mm	230mm x 335mm	57,7kg
RTX 60 Honda Benzin/Petrol 165mm stopa/Foot	3ks/hp / 2.3kW	450-660	Dijafragma Diaphragm	13,6kN	345mm x 975mm x 670mm	165mm x 335mm	60kg
RTX 60 Honda Benzin/Petrol 230mm stopa/Foot	3ks/hp / 2.3kW	450-660	Dijafragma Diaphragm	13,6kN	345mm x 975mm x 670mm	230mm x 335mm	60kg
RTX 60 Honda Benzin/Petrol 280mm stopa/Foot	3ks/hp / 2.3kW	450-660	Dijafragma Diaphragm	13,6kN	345mm x 975mm x 670mm	280mm x 335mm	60kg
RTX 66 Honda Benzin/Petrol 280mm stopa/Foot	3.2ks/hp / 2.6kW	450-600	Plovak Float Chamber	16,5kN	425mm x 1065mm x 700mm	280mm x 335mm	79kg
RTX 68 Honda Benzin/Petrol 280mm stopa/Foot	3ks/hp / 2.3kW	450-660	Dijafragma Diaphragm	16kN	345mm x 1040mm x 705mm	280mm x 335mm	70kg
RTX 70 Honda Benzin/Petrol 280mm stopa/Foot	3ks/hp / 2.3kW	450-700	Dijafragma Diaphragm	17kN	345mm x 1040mm x 714mm	280mm x 335mm	72kg
RTX 74 Honda Benzin/Petrol 280mm stopa/Foot	3.2ks/hp / 2.6kW	450-600	Plovak Float Chamber	18,6kN	425mm x 1065mm x 700mm	280mm x 335mm	84kg
RTX 80 Yanmar Dizel/Diesel 280mm stopa/Foot	4.7ks/hp / 3.5kW	450-600	Ubrizgavanje Injection	20,5kN	425mm x 1081mm x 700mm	280mm x 335mm	86kg





BELLE
LIGHT
CONSTRUCTION
EQUIPMENT



Valjak TDX 650

Hand roller TDX 650

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Jačina motora Engine Power	Frekvencija Frequency	Brzina kretanja unaprijed Forward Travel Speed	Brzina kretanja unatrag Reverse Travel Speed	Sila Force	Širina bubnja Drum Width	Širina x visina x dužina Width x Height x Length	Masa Weight
TDX 650 Dvostruki ručni valjak TDX 650 Twin Drum roller	Yanmar L100N 10ks/hp / 7.4 kW	3300 vpm	> 3.9km/hr	> 2.1km/hr	20kN	650mm	702mm x 1093mm x 2272mm	775kg



Valjak TDX 650A

Hand roller TDX 650A

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power	Frekvencija Frequency	Brzina kretanja unaprijed Forward Travel Speed	Brzina kretanja unatrag Reverse Travel Speed	Sila Force	Širina bubnja Drum Width	Širina x visina x dužina Width x Height x Length	Masa Weight
TDX 650A Dvostruki ručni valjak TDX 650A Twin Drum roller	Yanmar L100N 10ks/hp / 7.4kW Električni Electric	3300 vpm	> 3.9km/hr	> 2.1 km/hr	16kN	650mm	703mm x 1137mm x 2318mm	675kg
TDX 650A Dvostruki ručni valjak TDX 650A Twin Drum roller	Kubota EA330 6.9ks/hp / 5.2 kW Električni Electric	3300 vpm	> 3.9km/hr	> 2.1 km/hr	16kN	650mm	703mm x 1137mm x 2318mm	684kg



Megavib Plus ručni vibrator

Megavib Plus Poker

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Brzina motora bez opterećenja Motor Speed Unloaded	Brzina motora pod opterećenjem Motor speed loaded	Snaga Power	Punjenje Loading	Masa Weight
Megavib+pogonska jedinica 110v Megavib+Drive Unit 110v	16 000 o/min / rpm	12 000 o/min / rpm	1.6kW	13A	4.8kg
Megavib+pogonska jedinica 230v (16 Amp-3 pin utikač/plug) Megavib+Drive Unit 230v (16 Amp-3 pin utikač/plug)			2.3kW	10A	

Model	Promjer vibro igle Poker Diameter	Duljina glave Head length	Duljina vratila Shaft Length	Frekvencija Frequency	Centrifugalna sila Centrifugal Force	Masa Weight
Megavib+Fleksibilno vratilo 3m Megavib+Flexible Shaft 3m						
Megavib+Vibroigla 36mm Megavib+Poker head 36mm	36mm - 1 1/4 inch	292mm	3m	217Hz	4018 N	1.9kg
Megavib+Vibroigla 50 mm Megavib+Poker head 50 mm	50mm - 2 inch	327mm		200Hz	5039 N	3.7kg
Megavib+Vibroigla 57mm Megavib+Poker head 57mm	57mm - 2 1/4 inch	346mm		192Hz	6468 N	5kg
Megavib+Vibroigla 25mm + 3m fleksibilno vratilo Megavib+Poker head 25mm + 3m Shaft	25mm - 1 inch	300mm		225Hz	882 N	5.5kg



BGN Plus / BGN Turbo električni visoko frekventni vibrator

BGN Plus / BGN Turbo Electric High Frequency Poker

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Promjer vibro igle Poker Diameter	Duljina vibro igle Head length	Promjer djelovanja Action Diameter	Amplituda vibracije Vibration Amplitude	Centrifugalna sila Centrifugal Force	Struja napajanja Supply Current	Masa Weight
BGN+ 35	36mm - 1 1/8 inch	350mm	304mm	0.98mm	1390 N	5 A	9kg
BGN+ 45	42mm-1 1/2 inch	320mm	349mm	1.00mm	2100 N	5 A	10kg
BGN+ 50	50mm - 2 inch	400mm	416mm	1.01mm	3485 N	7 A	14kg
BGN+ 60	58mm - 2 5/16 inch	430mm	480mm	1.12mm	5165 N	8.5 A	15kg
BGN+ 70	65mm - 2 9/16 inch	430mm	520mm	1.11mm	6670 N	13.2 A	18kg
BGN Turbo 52	52mm - 2 inch	382mm	520mm	1.02mm	3815 N	10 A	14kg
BGN Turbo 58	58mm - 2 5/16 inch	410mm	580mm	1.09mm	5520 N	11 A	16kg
BGN Turbo 65	65mm - 2 9/16 inch	425mm	650mm	1.13mm	7275 N	13 A	18kg
BGN Turbo 75	75mm - 3 inch	430mm	750mm	1.22mm	8460 N	14 A	21kg



Visoko frekventni pretvarač BGF

High Frequency Converters BGF



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Napon Supply Input	Faza Phase	Broj izlaznih utičnica No. of Output Sockets	Izlazna struja Output Current	Širina x visina x dužina Width x Height x Length	Masa Weight
BGF 20 frekventni pretvarač / BGF 20 Frequency Converter	230 V	3	2	20 A	170mm x 460mm x 320mm	18 kg
BGF 24 frekventni pretvarač / BGF 24 Frequency Converter	230 V	1	2	21 A	270mm x 385mm x 525mm	28 kg
BGF 24T frekventni pretvarač / BGF 24T Frequency Converter	400 V	3	2	21 V	270mm x 385mm x 525mm	32 kg
BGF 34T frekventni pretvarač / BGF 34T Frequency Converter	400 V	3	3	34 V	445mm x 510mm x 560mm	34 kg
BGF 64T frekventni pretvarač / BGF 64T Frequency Converter	400 V	3	4	64 V	451mm x 570mm x 930mm	85 kg

MidiScreed 200 Kompaktna vibro letva

MidiScreed 200 Compact Screeder

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power	Brzina Speed	Vibracija Vibration	Širina letve Beam Width	Duljina ručke Handle Length	Visina pogonske jedinice Power Unit Height	Širina pogonske jedinice Power Unit Width	Masa Weight
MidiScreed 200 Honda Benzin/Petrol	1ks/hp / 0.71kW	7000 o/min / rpm	2.3kN	2000mm	2000mm	408mm	398mm	19kg



Easy Screed Pro Vibro letva

Easy Screed Pro Screeder



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power	Frekvencija Frequency	Max. dubina zbijanja Max. Compaction Depth	Širina x visina x dužina Width x Height x Length	Masa Weight
Benzinska pogonska jedinica - Easy Screed Pro Petrol Drive Unit- Easy Screed Pro	1.3ks/hp / 1kW	83Hz	75mm	700mm x 440mm x 1040mm	14.6kg
Easy Screed - Letva / Beam 1.9m	-	-	-	200mm x 100mm x 1900mm	7.8kg
Easy Screed - Letva / Beam 2.5m	-	-	-	200mm x 100mm x 2500mm	10.3kg
Easy Screed - Letva / Beam 3m	-	-	-	200mm x 100mm x 3000mm	12.3kg
Easy Screed - Letva / Beam 3.75m	-	-	-	200mm x 100mm x 3750mm	15.4kg
Easy Screed - Letva / Beam 4.25m	-	-	-	200mm x 100mm x 4250mm	17.5kg
Easy Screed - Letva / Beam 5m	-	-	-	200mm x 100mm x 5000mm	20.5kg
Easy Screed - Letva / Beam 5.5m	-	-	-	200mm x 100mm x 5500mm	22.6kg
Easy Screed - Letva / Beam 6m	-	-	-	200mm x 100mm x 6000mm	24.6kg



Ravnalica

Floats

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Širina Width	Dubina Depth	Ukupna dužina ručke Total Handle Length	Masa glave sa zglobovom Head Weight c/w Swivel	Ukupna masa ručke Total Handle Weight
Letva od legure magnezija sa zglobovom i drškom Bull Float c/w Swivel & Handle	1200mm	200mm	5.4m	6kg	3.6kg
Letva od kaljenog čelika sa zglobovom i drškom Big Blue c/w Swivel & Handle	1200mm	300mm	5.4m	11.1kg	3.6kg
Kombinirani alat za zagladenu površinu sa zglobovom i drškom Fresno Broom c/w Swivel & Handle	900mm	220mm	5.4m	4.8 kg	3.6kg



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Širina Width	Dubina Depth	Ukupna dužina ručke Total Handle Length	Masa glave sa zglobovom Head Weight c/w Swivel	Ukupna masa ručke Total Handle Weight
Alat za navlačenje betona Concrete Placer	495mm	115mm	1.4m	1.5kg	0,5kg
Grablje za navlačenja betona Concrete Rake	570mm	130mm	1.4m	1.5kg	0,5kg

Alati

Tools

Pribor za betoniranje

Concreting Accessories

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Pribor Pro Gladilice / Pro Trowels Accessories
Noževi i diskovi su visokokvalitetne izrade kako bi dali najbolju izvedbu za Vašu Pro gladilicu High quality Blades and Discs to give the best performance from your Pro Trowel
600mm Gladilice, noževi i diskovi / 600mm Trowel Blades and Discs
PRO 600 Završne gladilice na vijak / Bolt on Finish Blades, 4
PRO 600 / PRO 600X Plutajući disk/ploča Float Disc / Pan
900mm Gladilice Noževi i diskovi / 900mm Trowel Blades and Discs
PRO 900 Plutajuće gladilice / Float blades, 4
PRO 900 Završne gladilice / Finish blades, 4
PRO 900 Kombinirane gladilice / Combination blades, 4
PRO 900 Plutajući disk/ploča / Float Disc / Pan
1200mm Gladilice Noževi i diskovi / 1200mm Trowel Blades and Discs
PRO 1200 Plutajuće gladilice / Float blades, 4
PRO 1200 Završne gladilice / Finish blades, 4
PRO 1200 Kombinirane gladilice / Combination blades, 4
PRO 1200 Plutajući disk/ploča / Float Disc / Pan
Gladilice sa kvačicom za Dynapac / Clip-on finish blades for Dynapac (BG33, BG37, BG38)
Kitovi kotača / Wheel Kits
Kit-kotač gladilice / Trowel Wheel Kit



Lightweight Pro / Pro Tilt gladilica

Lightweight Pro / Pro Tilt Trowel

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Pogonska snaga Drive Power	Promjer zagladivanja Trowelling Diameter	Brzina zagladivanja Trowelling Speed	Širina x visina x dužina Width x Height x Length	Masa Total Handle Weight
Lightweight Pro 900M GX160 Honda	5.5ks/hp / 4kW	925mm	65-131 o/min / rpm	992mm x 781mm x 1866mm	79,5kg
Lightweight Pro 900M GX160 Honda sa sklopivom ručkom/foldable Handle	5.5ks/hp / 4kW	925 mm	65-131 o/min / rpm	992mm x 932mm x 2013mm	81kg
Lightweight Pro 900M EX17 Robin	6ks/hp / 4.5kW	925mm	65-131 o/min / rpm	992mm x 781mm x 1866mm	79.5kg
Lightweight Pro 900M EX17 Robin sa sklopivom ručkom/Foldable Handle	6ks/hp / 4.5kW	925mm	65-131 o/min / rpm	992mm x 932mm x 2013mm	81kg
Lightweight Pro 900M GX270 Honda	9ks/hp / 6.7kW	925mm	65-131 o/min / rpm	992mm x 781mm x 1866mm	88kg
Lightweight Pro 900M GX 270 Honda sa sklopivom ručkom/Foldable Handle	9ks/hp / 6.7kW	925mm	65-131 o/min / rpm	992mm x 932mm x 2013mm	89.5kg
Lightweight Pro Tilt 900M GX160 Honda	5.5ks/hp / 4kW	925mm	65-155 o/min / rpm	995mm x 781mm x 1855mm	79,5kg
Lightweight Pro 900M EX17 Robin	5.5ks/hp / 4kW	925mm	65-155 o/min / rpm	995mm x 781mm x 1866mm	79,5kg



Pro 600X gladilica

Pro 600X Trowel

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Pogonska snaga Drive Power	Promjer zagladivanja Trowelling Diameter	Brzina zagladivanja Trowelling Speed	Širina x visina x dužina Width x Height x Length	Masa Total Handle Weight
Pro 600X GX120 Honda benzin/Petrol	4ks/hp / 3kW	600mm-24inch	50-115 o/min / rpm	600mm x 930mm x 1500mm	53kg
Pro 600X električni/Electric 230v	3ks/hp / 2.1kW	600mm-24inch	115 o/min / rpm	600mm x 930mm x 1500mm	73kg

Pro gladilica

Pro Trowel

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Pogonska snaga Drive Power	Promjer zagladivanja Trowelling Diameter	Brzina zagladivanja Trowelling Speed	Širina x visina x dužina Width x Height x Length	Masa Total Handle Weight
Lightweight Pro 900M GX200 Honda	5.5ks/hp / 4kW	925mm	65-131 o/min / rpm	992mm x 781mm x 1866mm	79,5 Kg
Lightweight Pro 900M GX200 Honda sa sklopivom ručkom / Foldable Handle	5.5ks/hp / 4kW	925mm	65-131 o/min / rpm	992mm x 932mm x 2013mm	81kg
Lightweight Pro 900M EX17 Robin	6ks/hp / 4.5kW	925mm	65-131 o/min / rpm	992mm x 781mm x 1866mm	79,5kg
Lightweight Pro 900M EX17 Robin sa sklopivom ručkom / Foldable Handle	6ks/hp / 4.5kW	925mm	65-131 o/min / rpm	992mm x 932mm x 2013mm	81kg
Lightweight Pro 900M GX270 Honda	9ks/hp / 6.7kW	925mm	65-131 o/min / rpm	992mm x 781mm x 1866mm	88kg
Lightweight Pro 900M GX270 Honda sa sklopivom ručkom / Foldable Handle	9ks/hp / 6.7kW	925mm	65-131 o/min / rpm	992mm x 932mm x 2013mm	89,5kg
Pro 1200M GX270 Honda	9ks/hp / 6.7kW	1170mm	65-131o/min / rpm	1206mm x 1008mm x 2130mm	117kg
Pro 1200M GX270 Honda sa sklopivom ručkom / Foldable Handle	9ks/hp / 6.7kW	1170mm	65-131o/min / rpm	1206mm x 1008mm x 2130mm	117kg
Pro 1200M EX27 Robin	9ks/hp / 6.7kW	1170mm	65-131rpm	1206mm x 1008mm x 2130mm	117kg
Pro 1200M EX27 Robin sa sklopivom ručkom / Foldable Handle	9ks/hp / 6.7kW	1170mm	65-131rpm	1206mm x 1008mm x 2130mm	117kg





BELLE
LIGHT
CONSTRUCTION
EQUIPMENT



Pro Tilt gladilica s brzim podešavanjem nagiba / Pro Tilt Trowel

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Pogonska snaga Drive Power	Promjer zaglađivanja Trowelling Diameter	Brzina zaglađivanja Trowelling Speed	Širina x visina x dužina Width x Height x Length	Težina ručke Total Handle Weight
Pro Tilt 900M GX200 Honda	5,5ks/hp / 4kW	925mm	65-155 o/min / rpm	992mm x 1005mm x 2021mm	98,5kg
Lagana/Lightweight Pro Tilt 900M GX200 Honda	5,5ks/hp / 4kW	925mm	65-155 o/min / rpm	995mm x 781mm x 1866mm	79,5kg
Pro Tilt 1200M GX270 Honda	9ks/hp / 6.7kW	1140mm	65-155 o/min / rpm	1206mm x 1008mm x 2130mm	117kg



BC350 električna stolna rezalica

BC350 Electric bench saw

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power	Minimalna snaga transformatora Minimum Transformer Size
BC350 Električna rezalica za cigle 110v 32 Amp / BC350 Brick Saw Electric 110v 32 Amp	3ks/hp / 2.2kW	5 kVA
BC350 Električna rezalica za cigle 230v 16 Amp / BC350 Brick Saw Electric 230v 16 Amp	3ks/hp / 2.2kW	N/A

Struja Current Supply	Veličine rezne ploče Blade size	Brzina rezne ploče Blade speed	Širina x visina x dužina Width x Height x Length	Težina Weight
32Amp	350mm x 25.4mm	3000o/min / rpm	684mm x 1379mm x 1212mm	79kg
16Amp	350mm x 25.4mm	3000o/min / rpm	684mm x 1379mm x 1212mm	79kg

Dijamantne rezne ploče Diamond Blades



Vrsta ploče / Disc Qualita	PLATINUM ★★★★★	GOLD ★★★★★	GOLD ★★★★★	GOLD ★★★★★	BRONZE ★★	MISC ★★★★
Materijal aplikacije / Application Material	Razni materijali Multi Materials	Teški materijali Hard Materials	Opći materijali General Materials	Asfalt Asphalt	Osnovna upotreba General Purpose	Ravni rub Continuous Rim Tile Cutting
Product code	PUX	GH	GGP	GA	BGP	CRT
Šipka od nehrdajućeg čelika i pojačanje / Mild Steel Rods & reinforcement	★★	✗	✗	✗	✗	✗
Cijev za skele / Scaffolding Tube	★★	✗		✗	✗	✗
Granit/ Granite	★★★	★★★	✗	✗	✗	★★★★
Keramika, kamen, podne pločice od škriljca / Ceramir, Quarry, Floor & Slate Tiles	✗	✗	✗	✗	✗	★★★★
Blokovi / Engineering Blocks	★★★	★★★	✗	✗	✗	✗
Stari beton / Old Cured Concrete	★★★	★★★	✗	✗	✗	✗
Glinene cijevi / Clay Pipes	★★★	★★★	✗	✗	✗	✗
Glinena opeka / Dense Clay Bricks	★★★	★★★	✗	✗	✗	✗
Glineni opločnici / Clay Hard Pavers	★★★	★★★	★	✗	✗	✗
Tvrda opeka / Hard Facing Bricks	★★★	★★★	★	✗	★	✗
Betonska ploča za popločavanje / Concrete Paving Slabs	★★★	★★★	★★	✗	★	✗
Armirani betonski nadvoji / Reinforced Concrete Lintels	★★★	★★	★★★	✗	★	✗
Popravljeni beton / Cured Concrete	★★★	★	★★★	✗	★★	✗
Betonske cijevi i ivičnjaci / Concrete Pipes & Kerbs	★★★	★	★★★	✗	★★	✗
Srednje tvrda opeka / Medium Facing Bricks	★★★	★	★★★	✗	★★	✗
Tvrđi pješćanjak / Hard sandstone	★★★	★	★★★	✗	★	✗
Škriljevac/ Slate	★★★	✗	★★★	✗	★	✗
Srednje tvrdi opločnici / Medium Blocks Pavers	★★★	✗	★★★	✗	★	✗
Betonski crijep / Concrete Roofing tile	★★★	✗	★★	✗	★	✗
Srednje tvrdi pješćanjak / Medium sandstone	★★★	✗	★	★	★★	✗
Asfalt preko betona / Asphalt Over Concrete	★★★	✗	✗	★★	✗	✗
Lagani blok / Breeze Blocks	★★★	✗	★	★★	★	✗
Zeleni beton / Green Concrete	★★★	✗	✗	★★★		✗
Lignacit i zračni blok / Lignacite & Aerated Blocks	★★★	✗	✗	★★★	✗	✗
Asfalt / Asphalt	★★★	✗	✗	★★★	✗	✗

★★★★ Visoka izvedba / High Performance

★★★ Dobra izvedba / Good Performance

★★ Preporučeno / Recommended

★ Prihvatljivo / Acceptable

✗ Ne odgovara / Not Suitable



LIMEX
CROATIA
WHEELBARROWS
MIXERS

PUX



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Veličina Size	Brzina Speed	Visina reznog dijela Segment Height
PUX/30020	300mm x 20mm	6360 o/min / rpm	10mm
PUX/35025	350mm x 25mm	5450 o/min / rpm	10mm
PUX45025	450mm x 25mm	3395 o/min / rpm	12mm

GH



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Veličina Size	Brzina Speed	Visina reznog dijela Segment Height
GH/30020	300mm x 20mm	6360 o/min / rpm	15mm
GH/35025	350mm x 25mm	5450 o/min / rpm	15mm
GH/45025	450mm x 25mm	3395 o/min / rpm	15mm

GGP



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Veličina Size	Brzina Speed	Visina reznog dijela Segment Height
GGP/35025	350mm x 25mm	5450 o/min / rpm	15mm
GGP/45025	450mm x 25mm	3395 o/min / rpm	15mm
GGP/50025	500mm x 25mm	5450 o/min / rpm	15mm

GA



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Veličina Size	Brzina Speed	Visina reznog dijela Segment Height
GA/30020	300mm x 20mm	6360 o/min / rpm	10mm
GA/35025	350mm x 25mm	5450 o/min / rpm	10mm
GA/45025	450mm x 25mm	3395 o/min / rpm	10mm

BGP



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Veličina Size	Brzina Speed	Visina reznog dijela Segment Height
BGP/23022	230mm x 22mm	6650 o/min / rpm	10mm
BGP/30020	300mm x 20mm	6360 o/min / rpm	10mm

CRT



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Veličina Size	Brzina Speed	Visina reznog dijela Segment Height
CRT/18025	180mm x 25mm	8730 o/min / rpm	10mm
CRT/20025	200mm x 25mm	7600 o/min / rpm	10mm
CRT/23025	230mm x 25mm	6650 o/min / rpm	10mm

Rezač betonskih Minipave blokova

Block Paving Minipave splitter

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Sila rezanja Cut Force	Vrsta oštrice Blade Type	Pomak škara Cam Movement	Vijci za pomicanje Adjustment Screws	Dubina bloka Block Depth	Maks. duljina reza Max. cut Length	Masa Weight
Minipave	3200kg - 31,4kN	2 od 8mm kvadratnog presjeka 2 off 8mm square section 250mm duljina/long	po bloku/block clearance 3mm za rezanje/cutting 2mm	Brzo djelujući trapezoidni 40mm Fast Acting Trapezoid 40mm	47-87 mm	250mm	18kg





BELLE
LIGHT
CONSTRUCTION
EQUIPMENT



Rezač betonskih Maxipave blokova

Block Paving Maxipave splitter

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Sila rezanja Cut Force	Dužina oštrice Blade Length	Maks. dužina reza Max. cut Length	Masa Weight
Maxipave	45,6kN	408mm	120mm	35,5kg



Maxitile 260

Maxitile 260

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Motor Power	Veličina noža Blade Size	Veličina oštrice noža Blade ID Bore Size	Max. dubina rezanja Max. Depth of Cut
Maxitile 260 230v	650w	200mm	25,4mm	40mm
Max. dužina reza Max. Length of cut	Kapacitet spremnika Tank Capacity	Širina x Visina x Dužina Width x Height x Weight	Masa Weight	
650mm	20.5L	440mm x 1160mm x 1250mm	34kg	



Alati za popločavanje

Block Paving Tools

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model
Klin za razmak / Gap Wedge
Podizač za blokete / Block Lifter
Malj za blokete / Block Mallet
Podizač odrezanih bloketa / Block Clip Lifter 200
Podizač odrezanih bloketa / Block Clip Lifter 800



Hidraulični čekići

BHB Hydraulic Breakers

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Razina vibracije Vibration Level-Midi Power Pack	Razina vibracije Vibration Level-Major Power Pack	Prigušnica Restrictor
BHB 12	16.08 m/sec2	-	Otvorena/Open
BHB 19	11.97 m/sec2	-	Otvorena/Open
BHB 23	11.97 m/sec2	-	Otvorena/Open
BHB 25	11.1 m/sec2	11.1 m/sec2	3.8
BHB 25x	6.5 m/sec2	6 m/sec2	Otvorena/Open
BHB 27	11.8 m/sec2	11.8 m/sec2	3.4
BHB 27	-	18.61 m/sec2	Otvorena/Open
BHB 27X	8.2 m/sec2	-	3.4
BHB 27X	-	6.8 m/sec2	Otvorena/open

Radni pritisak Working Pressure	Max. pritisak Max. Pressure	Protok Flow	Udaraca/min Blows/min	Sila razbijanja Breaking Force	Veličina čeličnog dijela Steel Size	Masa Weight
70-90 bar	160 bar	20 L/min	2400	25 džula/Joules	22mm x 82mm	14kg
90-110 bar	160 bar	20 L/min	1600	65 džula/Joules	25mm x 108mm	19kg
90-110 bar	160 bar	20 L/min	1600	65 džula/Joules	25mm x 108mm	23.5kg
105-125 bar	160 bar	20 L/min	1300	85 džula/Joules	32mm x 160mm	28kg
90-110 bar	160 bar	20 L/min	1600	55 džula/Joules	32mm x 160mm	27.5kg
105-125 bar	160 bar	20 L/min	1300	85 džula/Joules	32mm x 160mm	28kg
105-125 bar	160 bar	30 L/min	2150	85 džula/Joules	32mm x 160mm	28kg
105-125 bar	160 bar	20 L/min	1300	85 džula/Joules	32mm x 160mm	30kg
105-125 bar	160 bar	30 L/min	2150	85 džula/Joules	32mm x 160mm	30kg



Pribor za čekić

Breaker Steel



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Tip / Type	Dimenzije / Dimensions			
		Ulazni vrh / Collar to tip		Oštrica širina x visina / Blade width x height	
		(mm)	(inch)	(mm)	(inch)
Čelični nastavci / Steels 32 x 160mm (1¼ x 6¼") odgovara / to fit BHB25, BHB25 X, BHB27, BHB19USA					
Špica / Moil Point 32mm	1	380	15	-	-
Velika špica / Large Moil Point 32mm	1	455	18	-	-
Dlijeto 32mm / Chisel 32mm	2	380	15	-	-
Veće dlijeto 32mm / Large Chisel 32mm	2	455	18	-	-
Široko dlijeto 32m / Broad Chisle 32mm	4	380	15	75x50	3x2
Veliko i široko dlijeto 32m / Large Broad Chisle 32mm	4	455	18	75x50	3x2
Razbijač asfalta 32mm / Asphalt Cutter 32mm	5	380	15	125x50	5x2
Veliki razbijač asfalta 32mm / Large Asphalt Cutter 32mm	5	330	13	125x150	5x6
Sjekač za asfaltne zakrpe / Tarmac Cutter 32mm	6	280	11	115x125	4½x5
Sjekač za kopanje / Digging Chisel 32mm	7	355	14	75x230	3x9
Lopatica za kopanje / Digging Spade 32mm	8	355	14	125x20	5x8
Lopatica za glinu / Clay Spade 32mm	9	380	15	140x230	5½x9
Probijač / Stem 32mm	10	230	9	-	-
Stopa nabijača / Rammer Pad (32mm)	11	180 dia	7 dia	-	-
Čelični nastavci / Steels 25 x 108mm (1 x 4¼) odgovara / to fit BHB19, BHB23					
Špica / Moil Point 25mm	1	380	15	-	-
Velika špica / Large Moil Point 25mm	1	455	18	-	-
Dlijeto / Chisel 25mm	2	380	15	-	-
Veće dlijeto / Large Chisel 25mm	2	455	18	-	-
Široko dlijeto / Broad Chisel 25mm	4	380	15	75x50	3x2
Veliko i široko dlijeto / Large Broad Chisel 25mm	4	455	18	75x50	3x2
Veliki razbijač asfalta / Large Asphalt Cutter 25mm	5	380	15	125x150	5x6
Sjekač za asfaltne zakrpe / Tamac Cutter 25mm	6	305	12	115x125	4½x5
Sjekač za kopanje / Digging Chisel 25mm	7	355	14	75x230	3x9
Lopatica za kopanje / Digging Spade 25mm	8	355	14	125x200	5x8
Lopatica za glinu / Clay Spade 25mm	9	355	16	125x200	5x8
Probijač / Stem 25mm	10	200	8	-	-
Stopa nabijača / Rammer Pad (25&25mm)	11	125 dia	5 dia	-	-
Rastavljač željezničkih spojnica / Rail Clip Extractor		370	14¼	55x100	2¼x4
Čelični nastavci / Steels 22 x 82mm (7/8 x ¾) odgovara / to fit BHB12					
Špica / Moil Point 22mm	1	380	15	-	-
Velika špica / Large Moil Point 22mm	1	455	18	-	-
Dlijeto / Chisel 22mm	2	380	15	-	-
Veće dlijeto / Large Chisel 22mm	2	455	18	-	-
Široko dlijeto / Broad Chisel 22mm	4	380	15	75X50	3X2
Veliko i široko dlijeto / Large Broad Chisel 22mm	4	455	18	75X50	3X2
Veliki razbijač asfalta / Large Asphalt Cutter 22mm	5	380	15	125X150	5X6
Sjekač za kopanje / Digging Chisel 22mm	7	355	14	75X230	3X9
Lopatica za glinu / Clay Spade 22mm	9	405	16	125X200	5X8
Probijač / Sterm 22mm	10	200	8	-	-
Stopa nabijača / Rammer Pad (25 & 22mm)	11	125 dia	5 dia	-	-



BELLE
LIGHT
CONSTRUCTION
EQUIPMENT



Agregat Bulldog

Power Packs Bulldog

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power	Duljina crijeva Hose length	Tlak Pressure	Protok Flow
Bulldog Honda Benzinski motor Bulldog Honda Petrol	9.0ks/hp / 6.6kW	6.75m	140bar	20L/min.
Bulldog Honda Benzinski motor + ladica za alat Bulldog Honda Petrol + Tool Tray	9.0ks/hp / 6.6kW	6.75m	140bar	20L/min.

Kapacitet spremnika za ulje Oil Tank Capacity	Kapacitet spremnika za gorivo Fuel Tank Capacity	Širina x visina x dužina Width x Height x Length	Masa Weight
5.6L	6.0L	515mm x 620 mm x 705mm	59,5kg
5.6L	6.0L	683mm x 320mm x 705mm	59,5kg



HPP Hidraulični agregati

HPP Hydraulic Power Packs



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Motor Engine Power	Tlak Pressure	Protok Flow	Širina x visina x dužina Width x Height x Length	Masa Weight
MIDI 20-140 HONDA GX 270 UK	9.0ks/hp / 6.6kW	140bar	20L/min.	555mm x 620mm x 740mm	60kg
MAJOR 30-140 HONDA GX 390	13.0ks/hp / 9.6kW	140bar	30L/min.	555mm x 620mm x 740mm	72kg
MIDI 20-140 HONDA GX 270	9.0ks/hp / 6.6kW	140bar	20L/min.	555mm x 620mm x 740mm	60kg
MIDI 20-110D Diesel Lombardini	7.5ks/hp / 5.5kW	110bar	20L/min.	555mm x 620mm x 740mm	67kg
MAJOR 20-160X HONDA GX 390	13.0ks/hp / 9.6kW	160bar	20L/min.	555mm x 620mm x 740mm	72kg

HDC 350 hidraulični rezač

HDC 350 Disc Cutter

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Protok ulja Oil flow	Maksimalni tlak Max pressure	Broj okretaja Revolutions	Brzina Speed		
HDC 350 Hidraulični rezač HDC 350 Hydraulic Disc Cutter	20-30L/min,	170bar	2500-4000 o/min / rpm	46-75m/s		
Veličina noža Blade size	Veličina otvora Arbor size	Dubina rezanja Cutting depth	3-osi razine vibracije 3-axis Vibration Level	Razina zvuka Sound Power Level	Masa sa crijevom Weight inc. Hoses	Masa sa rezačem Service Weight inc. Blade
350mm	25.4mm	133mm	4.9m/sec2	108dB(A)	12kg	13.5kg



Hidraulična vodena pumpa

Hydraulic Water Pump



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Kapacitet Capacity	Crijevo za pražnjenje Discharge Hose	Hidraulički protok Hydraulic Flow	Tlak ulja Oil Pressure	Masa pumpe Weight of Pump alone	Masa pumpe sa crijevom Weight Of Pump With hose
Pumpa za vodu Heavy duty water pump	52m³/h	50mm/2'	20L/min.	140bar	10kg	26kg
2" Crijevom za pražnjenje 2" Discharge Hose						
Glavni set crijeva Main hose set						

BMD 300 Minidumper

BMD 300 Minidumper

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Motor Power	Kapacitet spremnika za gorivo Fuel Tank Capacity	Maksimalna brzina kretanje naprijed Max. Travel Speed Fwd
BMD 300 Višenamjenske gume BMD 300 Multi-purpose tyres	Honda Benzin/Petrol GXV160 5.5ks/hp / 4 kW	2.5L	6km/h
BMD 300 Plutajuće gume BMD 300 Flotation Turf Tires			

Maksimalna brzina kretanja unatrag Max. Travel Speed Rev	Utovarni kapacitet Skip Capacity - Level Filled	Utovarni kapacite krupnog materijala Skip Capacity - Heaped	Širina x visina x dužina Width x Height x Length	Masa Weight
2.6km/h	113L	134L	716mm x 934mm x 1609mm	155kg
			1004mm x 934mm x 1609mm	195kg



BMD 300 Nosiva ploča bez stranica

BMD 300 Flatbed

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Ukupna duljina Overall Legth	Ukupna širina Overall Width	Ukupna visina Overall Height
BMD 300 Nosiva ploča bez stranica BMD 300 Flatbed	1550mm	716mm	1030mm
Masa stroja Machine Weight	Masa nosive ploče Flatbed Weight	Površina Surface Area	Korisna nosivost Max. Payload
143,2kg	13,2kg	0,35m ²	300kg

BMD 300 Rampa

BMD 300 Ramps

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

TECHNICAL DATA / TECHNICAL SPECIFICATION				
Model	Ukupna duljina Overall Legth	Duljina gornjeg dijela Length - Top Section	Duljina srednjeg dijela Lenght - Middle Section	Duljina donjeg dijela Lenght - Bottom Section
BMD 300 Rampa BMD 300 Ramps	3966mm	1144mm	1500mm	1305mm

Maksimalna visina Max. Height	Maksimalna širina gornjeg dijela Max. Width Top Section	Maksimalna širina donjeg dijela Max. Width Bottom Section	Masa po sekciji Weight Per Section
1250mm	786mm	953mm	30kg



BMD 300 Ralica za snijeg

BMD 300 Snow Plough

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Ukupna duljina Overall Legth	Ukupna širina Overall Width
BMD 300 Ralica za snijeg BMD 300 Snow Plough	1810mm	940mm
Ukupna visina Overall Height	Masa stroja Machine Weight	Masa ralice za snijeg Snow Plough Weight
1150mm	195kg	140kg



BELLE
LIGHT
CONSTRUCTION
EQUIPMENT



BMD 300 sa gumama za travu

BMD 300 Turf Tyres

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Ukupna dužina Overall Length	Ukupna širina Overall Width	Ukupna visina Overall Height
BMD 300 sa gumama za travu BMD 300 Turf Tyres Option	1550mm	1004mm	1588mm

Masa stroja Machine Weight	Masa gume Turf Tyres Weight	Tlak guma Turf Tyres Pressure	Veličina gume Turf Tyre Size
195kg	10kg	1.5bar	50cm x 25cm - 20cm 20in x 10in - 8in



GPX Agregati

GPX Generators

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Snaga motora Engine Power 3000rpm	PRP Snaga/ Rating	COP Snaga/Rating (Kontinuirano/Continuous)
GPX 2700 Honda GX200 Benzin / Petrol	4.3ks/hp / 3.3kW	2.2kW	2.0kW
GPX 3400 Honda GX200 Benzin / Petrol	4.3ks/hp / 3.3kW	2.7kW	2.5kW
GPX 5000 Honda GX270 Benzin / Petrol	6.2ks/hp / 4.6kW	4.0kW	3.6kW
GPX 5000 Honda GX270 Benzin / Petrol + kotači/ Wheel Kit	6.2ks/hp / 4.6kW	4.0kW	3.6kW

Broj utičnica No. of Sockets			Spremnik za gorivo Fuel Tank	Frekvencija Frequency	Dimenzije Dimensions	Masa Weight
110V 16a	230V 16a	110V 32a			Š x V x D W x H x L	
1	1	-	3.1L	50Hz	432mm x 515mm x 618mm	46kg
1	1	1	3.1L	50Hz	432mm x 515mm x 618mm	47kg
2	1	1	5.6L	50Hz	512mm x 595mm x 728mm	64kg
2	1	1	5.6L	50Hz	778mm x 552mm x 661mm	79kg



GPX Jedinica za testiranje

GPX Test Unit

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Nazivni napon Nominal Voltage	Raspon napona Voltage Range	Faza Phase	Frekvencija Frequency
GPX Jedinica za testiranje GPX Test Unit	110V/230V	0-300V	1	45-65Hz

Broj izlaznih utičnica Output Sockets		Duljina kabla Cable Length	Dimenzije Dimensions Š x V x D W x H x L	Masa Weight
110V 16a	230V 16a			
1	1	2 m	220mm x 253mm x 281mm	4.2kg







PLETTAC
ASSCO
GERÜSTE
SCAFFOLDING



Gradevinske skele SL 70

Facade Scaffolding SL 70

Standardna oprema / Standard Equipment	Duljina skele / Radna visina - Scaffold Length / Working Height			Masa	123,00 x 8,20	63,00 x 8,20	36,00 x 8,20	18,00 x 8,20	12,00 x 8,20
	Pos	Code	Opis / Description		1009 m ²	517 m ²	295 m ²	148 m ²	98 m ²
	1	5FSL7103004	Lagani čelični okomiti okvir SL W74 Steel Vertical Frame SL W74 light	18,30	126	66	39	21	15
	2	5FSLN04000	Drvena podloga SL W32 4,8H x 300L Timber Deck SL W32 4,8 x 300L	21,70	246	126	72	36	24
	3	5FSNN060000	Vertikalni oslonac SL 366L Vertical Brace SL 366L	11,40	27	15	9	6	3
	4	5FSNN5003	Zaštitna ograda SL 300L Guard Rail SL 300L	5,2	173	89	51	26	17
	5	5F00202214	Dvostruka zaštitna ograda SL 74L Double End Guard Rail SL 74L	3,7	2	2	2	2	2
	6	5FSNN14000	Daska za SL podlogu 15H x 300L Toeboard for SL Decks 15H x 300L	5,9	82	42	24	12	8
	7	5FSL715000	Rub daske SL End Toeboard SL	1,4	2	2	2	2	2
	8	5FSL764000	Nosač čelične ograde SL Steel Guard Rail Support SL	5,2	40	20	11	5	3
	9	5FSL763500	Okvir čelične ograde SL 100H x 74W End Guard Rail Frame SL 100H x 74W	12,80	2	2	2	2	2
	10	5FS0659006	Stope skele 40H Base Plate 40H	2,60	84	44	26	14	10
	11	5FSNN61000	Dijagonalni nosač za pričvršćivanje SL Diagonal Fixing Bracket SL	0,4	18	10	6	4	2
Ukupna težina / Total Weight					9.806 kg	5.082 kg	2.949 kg	1.540 kg	1.043 kg

Spojnice / Ties	1	5FSLN25000	Razdjelna spojnica SL 80L Scaffold Tie with fork SL 80L	3,10	44	24	15	9	7
	2	5FKUP10010	Spojnik 48.3/48.3, HKS63, SW22 A/F Normal Coupler 48.3/48.3, HKS63, SW22 A/F	1,0	44	24	15	9	7
	3	5FDIV00107	Vijak s ušicom 12 x 120 mm Eyebolt 12 x 120 mm	0,2	44	24	15	9	7
	4	5FDIV00105	Tipla 14mm, L70 Expansion Anchor 14mm, L70	0,0	44	24	15	9	7
	5	5FDIV00104	Plastični čep za rupe Ø 14mm Plastic Cap for drilled holes Ø 14mm	0,0	44	24	15	9	7
	Ukupna težina / Total Weight				190 kg	104 kg	65 kg	39 kg	30 kg

Dodatna oprema / Supplementary Equipment	1	5FSNN05003	Zaštitna ograda SL dužine 300 cm Guard Rail SL for bay length 300 cm	5,2	82	42	24	12	8
	2	5F00202214	Dvostruka zaštitna ograda SL 74L Double End Guard Rail SL 74L	3,7	2	2	2	2	2
	3	5FSNN14000	Drvena zaštita SL 15H x 300L Toeboard for SL Decks 15H x 300L	5,9	41	21	12	6	4
	4	5FSL715000	Krajnja zaštitna daska SL End Toeboard SL	1,4	2	2	2	2	2
	Ukupna težina / Total Weight				679 kg	353 kg	206 kg	108 kg	75 kg

Kućna ljestva 120kg

Household step ladder 120kg

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Broj gazišta Number of steps	Duljina ljestava Ladder Length	Visina gornjeg gazišta Height of the top step	Radna visina Working height	Masa Weight
D05D/02	3871880001305	2	1085mm	420mm	2420mm	2,30kg
D05D/03	3871880001046	3	1250mm	560mm	2560mm	2,69kg
D05D/04	3871880001053	4	1480mm	780mm	2780mm	3,16kg
D05D/05	3871880001060	5	1720mm	1000mm	3000mm	3,65kg
D05D/06	387188001077	6	1955mm	1230mm	3232mm	4,30kg
D05D/07	3871880001084	7	2190mm	1450mm	3450mm	5,23kg
D05D/08	3871880001091	8	2390mm	1665mm	3650mm	5,50kg



Dupla kućna ljestva

Double domestic ladder

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Broj gazišta Number of steps	Visina raširenih ljestava Height of outsread ladder	Visina zat- vorenih ljestava Height of closed ladder	Radna visina Working height	Masa Weight
C04CNP/02	3871880001398	2x2	420mm	485mm	2420mm	1,90kg
C04CNP/03	3871880001404	2x3	650mm	720mm	2650mm	2,63kg
C04CNP/04	3871880001411	2x4	865mm	945mm	2865mm	3,45kg
C04CNP/05	3871880001428	2x5	1080mm	1170mm	3080mm	4,55kg
C04CNP/06	3871880001435	2x6	1300mm	1405mm	3300mm	5,25kg
C04CNP/07	3871880001442	2x7	1520mm	1635mm	3520mm	6,14kg





Kućna ljestva 150kg

Household step ladder 150kg

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Broj gazišta Number of steps	Širina Width	Visina zatvorenih ljestava Height of closed ladder	Visina gornjeg gazišta Height of the top step	Radna visina Working height	Masa Weight
CXT06/03	3871880001541	2+1	418mm	1250mm	560mm	2360mm	3,00kg
CXT06/04	3871880001558	3+1	445mm	1480mm	780mm	2580mm	3,60kg
CXT06/05	3871880001565	4+1	470mm	1720mm	1000mm	2800mm	4,20kg
CXT06/06	3871880001572	5+1	490mm	1955mm	1230mm	3030mm	5,00kg
CXT06/07	3871880001589	6+1	520mm	2190mm	1450mm	3250mm	6,70kg
CXT06/08	3871880001596	7+1	545mm	2420mm	1655mm	3465mm	7,15kg



Ravna ljestva

Straight ladder

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Broj gazišta Number of steps	Širina Width	Visina Height	Radna visina Working height	Masa Weight
B02B/200	3871880000674	1x7	362mm	1995mm	2896mm	2,70kg
B02B/230	3871880000681	1x8	362mm	2275mm	3175mm	3,30kg
B02B/250	3871880001497	1x9	362mm	2547mm	3447mm	3,50kg
B02B/280	3871880000698	1x10	362mm	2835mm	3735mm	4,00kg
B02B/330	3871880000704	1x12	770mm	3387mm	4287mm	5,35kg
B02B/380	3871880000711	1x14	770mm	3947mm	4847mm	6,25kg
B02B/430	3871880000728	1x16	900mm	4507mm	5407mm	7,30kg
B02B/480	3871880000733	1x18	900mm	5067mm	5967mm	8,65kg



Istezajuće dvodijelne ljestve

Extension ladder two sections

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Broj gazišta Number of steps	Širina Width	Duljina zatvorenih ljestava Length of closed ladder	Duljina produženih ljestava Length of extended ladder	Visina produženih ljestava Height of ladder extended	Radna visina Working height	Masa Weight
B14B2/200	3871880000742	2x7	764mm	1987mm	3107mm	2922mm	3822mm	8,00kg
B14B2/230	3871880000759	2x8	764mm	2267mm	3387mm	3185mm	4085mm	9,00kg
B14B2/250	3871880000766	2x9	764mm	2547mm	3947mm	3710mm	4610mm	10,00kg
B14B2/280	3871880000773	2x10	894mm	2827mm	4507mm	4237mm	5137mm	11,00kg
B14B2/300	3871880000780	2x11	894mm	3107mm	5067mm	4763mm	5663mm	14,40kg
B14B2/330	3871880000797	2x12	984mm	3387mm	5627mm	5288mm	6188mm	15,30kg



Kombinirane dvodijelne ljestve

Combination ladder in two sections

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Broj gazišta Number of steps	Širina Width	Duljina zatvorenih ljestava Length of closed ladder	Duljina produženih ljestava Length of extended ladder	Visina raširenih ljestava Height of outspredd ladder	Visina produženih ljestava Height of extended ladder	Radna visina Working height	Masa Weight
B10B2/170	3871880001534	2x6	764mm	1707mm	2255mm	1615mm	2117mm	3017mm	5,90kg
B10B2/200	3871880000810	2x7	764mm	1987mm	3107mm	1905mm	2922mm	3822mm	6,70kg
B10B2/230	3871880000827	2x8	764mm	2267mm	3387mm	2165mm	3185mm	4085mm	7,80kg
B10B2/250	3871880000834	2x9	764mm	2547mm	3947mm	2420mm	3710mm	4610mm	8,10kg
B10B2/280	3871880000841	2x10	894mm	2827mm	4507mm	2710mm	4237mm	5137mm	9,00kg
B10B2/300	3871880000858	2x11	894mm	3107mm	5067mm	2980mm	4763mm	5663mm	11,60kg
B10B2/330	3871880000865	2x12	984mm	3387mm	5627mm	3230mm	5288mm	6188mm	12,20kg
B10B2/350	3871880000872	2x13	984mm	3667mm	6187mm	3470mm	5814mm	6714mm	13,30kg





Kombinirane trodijelne ljestve

Combination ladder in three sections

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Broj gazišta Number of steps	Širina Width	Duljina zatvorenih ljestava Length of closed ladder	Duljina produženih ljestava Length of extended ladder	Visina raširenih ljestava Height of outspread ladder	Radna visina produženih ljestava Working height of extended ladder	Radna visina raširenih ljestava Working height of outspread ladder	Masa Weight
B10B3/170	3871880001510	3x6	700mm	1730mm	3650mm	2440mm	4320mm	3340mm	9,00kg
B10B3/200	3871880000889	3x7	770mm	1995mm	4240mm	2945mm	5140mm	3845mm	10,30kg
B10B3/230	3871880000896	3x8	900mm	2275mm	4520mm	3225mm	5420mm	4125mm	11,50kg
B10B3/250	3871880000902	3x9	900mm	2555mm	5360mm	3730mm	6260mm	4630mm	13,50kg
B10B3/280	3871880000919	3x10	900mm	2835mm	6210mm	4300mm	7110mm	5200mm	15,80kg
B10B3/300	3871880000926	3x1	990mm	3115mm	6754mm	4620mm	7654mm	5520mm	18,30kg



Zglobna ljestva

Multipurpose hinged ladders

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Visina zatvorenih ljestava Height of closed ladder	Visina horizontalnih ljestava Height of horizontal ladder	Visina raširenih ljestava Height of outspread ladder	Širina Width	Masa Weight
B05ZG/4x3	3871880001298	980mm	970mm	1725mm	356/334	11,85kg



Mini skela 2x6

Mini scaffolding

TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Model	Šifra artikla Article code	Širina skele Width scaffoldin	Širina Wisth	Visina produženih ljestava Height of extended ladder	Radna visina Working height	Masa Weight
B10P26/170	3871880001466	1590mm	700mm	2800mm	3000mm	16,80kg





LIMEX
CROATIA
WHEELBARROWS
MIXERS



Emajlirane cijevi

Flue pipes



TEHNIČKI PODACI / TECHNICAL SPECIFICATION

Dimenzije / Visina Dimensions / Height	Promjer Ø Width Ø
1000 mm / 500 mm / 250 mm	110 mm / 120 mm / 130 mm / 145 mm / 150 mm

Radijatori

Radiators



Kaminske cijevi

Fluepipes for fireplace



Oprema za kamine

Accessories

